

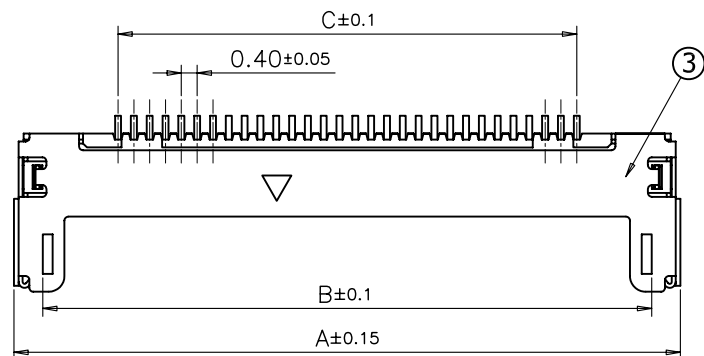


Notes :

1. Insulator : LCP , UL94V-0 ; Color : Black
2. Contact : Phosphor bronze
3. Contact finish : Gold Plated over Nickel
4. Shield : Phosphor bronze
5. Shield finish : Gold flash on solder area ; Over Nickel.

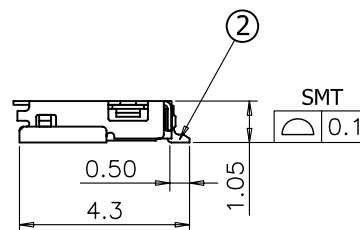

SMT
0.1

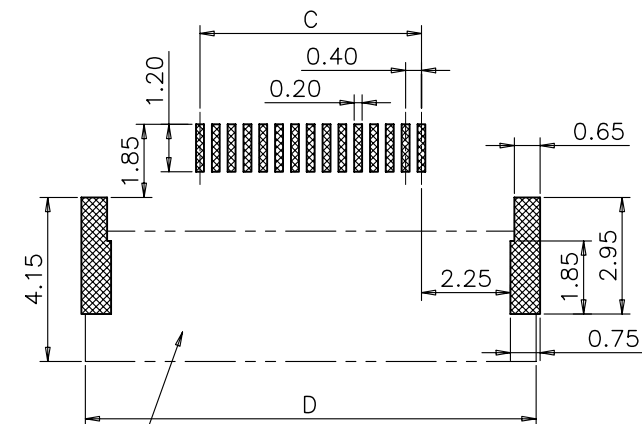

Area where components can not be mounted.
This area is ground pattern only.

Recommended PCB layout (Ref.)

Table 1 -- Dim.

Pos.	A	B	C	D	E	Note
30	16.80	15.40	11.60	17.40	10.50	
35	18.80	17.40	13.60	19.40	12.25	
40	20.80	19.40	15.60	21.40	14.00	



3	Shield	1	Phosphor bronze	Gold plating	
2	Contact	Table-1	Phosphor bronze	Gold plating	
1	Insulator	1	LCP+GF	—	UL94V-0
No.	Description	Quantity	Material	Finish	Note

FIJH-W-xx-LF
LEADFREE
RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. FIJH-W-xx

DWG NO. FIJH-W-xx

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

DESCRIP TION:

Board to Wire Conn.
0.4mm Pitch, Socket Low profile

AREA

REVISIONS

HK

DATE

煜倫股份有限公司