
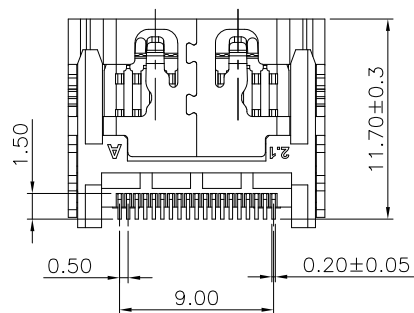
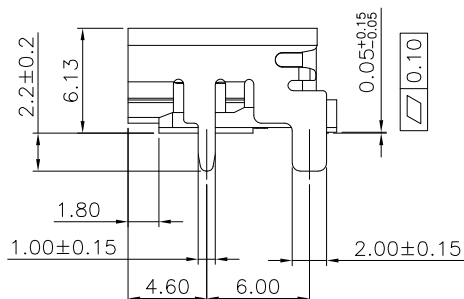
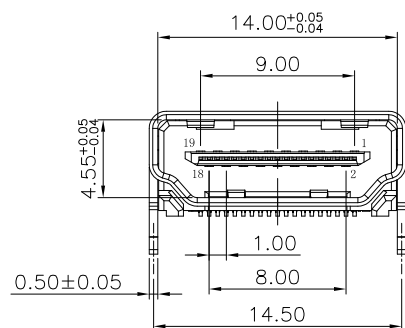



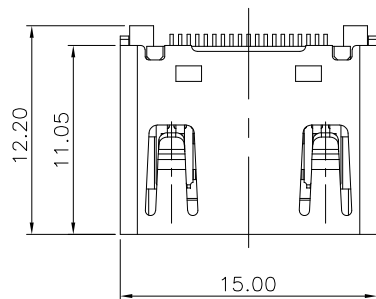


NOTE:

MATERIALS:

1. Housing: LCP Color: Black
2. Contacts: Brass T=0.20
3. Shell: Brass Or SPCC T=0.50

PLATING:

1. Contacts: Gold Plated on Contact Area
Matte Sn(80u"Min.) Plated on Solderails
Nickel(30u"Min.) Under Plated Over All
2. Shell: Nickel(80u"Min.) Plated

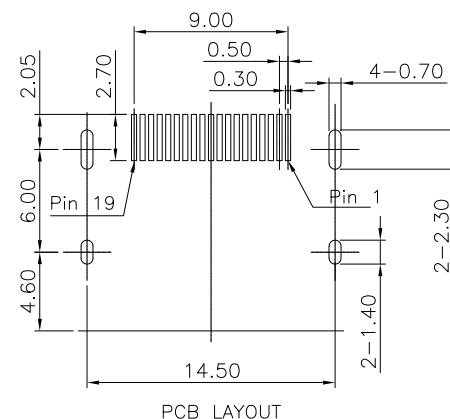

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.075
ANG ±

PPOJECTION




照片框

ORDER INFORMATION


HDMI-SWMR-19V21-LF

SERIES
FEMALE
19 WAY
REEL
METAL FOOT
90°SMT
LEADFREE
HDMI 2.1

DESCRIPTION: HDMI 2.1 A/F SMT 腳長2.2

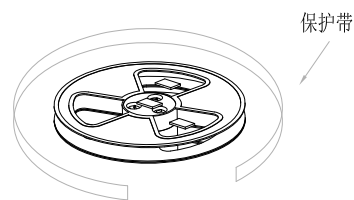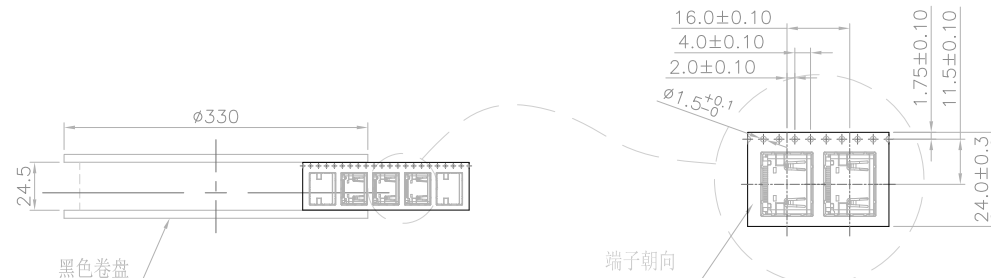
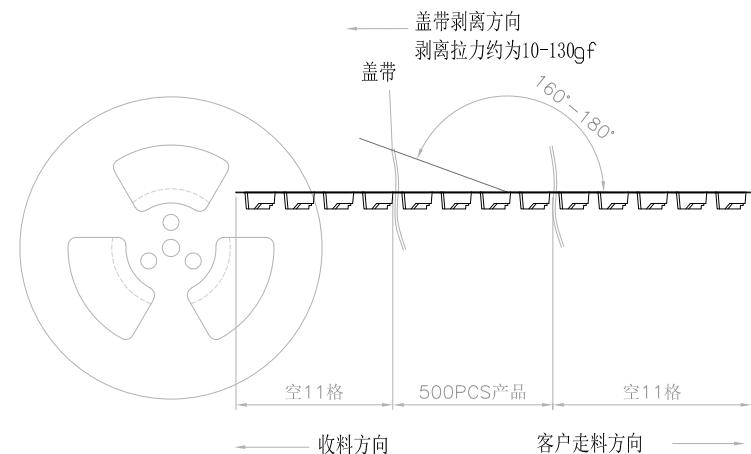


每盘最外圈缠
一圈保护带



12盘叠好装箱

外箱四个角各放置
一个护角

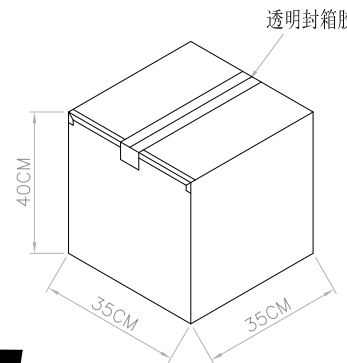

Notes:

1. 每卷前空11PCS, 后空11PCS, 中间包装500PCS产品, 尾部用美纹胶纸封住.
2. 外圈再卷一圈保护带, 保护带最后重叠50MM MIN. 同样用美纹胶将其封住.
3. 每个卷盘上贴一张物料标签 (如客户需求按要求填写).
4. 每12卷盘装入1个外箱, 外箱角落用三角板填充. 用透明胶将外箱封口.
5. 将标签 (按要求打印好的) 贴在纸箱侧麦上方.
6. 尾数箱用填充物填满空间.
7. 在搬运过程中要轻拿轻放.
8. 在运输中不可堆放过多, 不可有重压现象.
9. 尾数卷任然保持前后空11格

注: 客户特殊要求请参照业务的出货资料

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.075
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HDMI-SWMR-19V21-LF

SERIES LEADFREE
HDMI 2.1
19 WAY
REEL
METAL FOOT
90°SMT
FEMALE

DESCRIPTION: HDMI 2.1 A/F SMT 腳長2.2 包装规范