

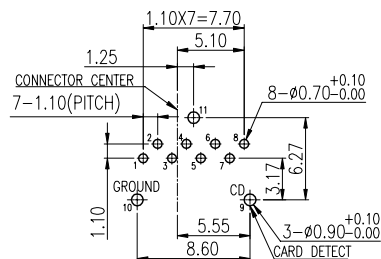
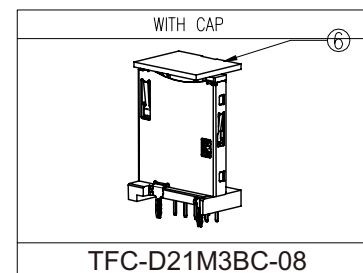
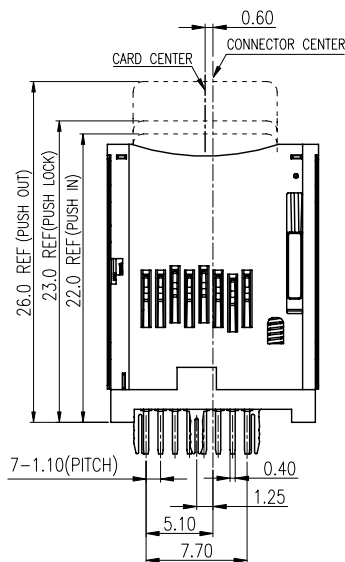
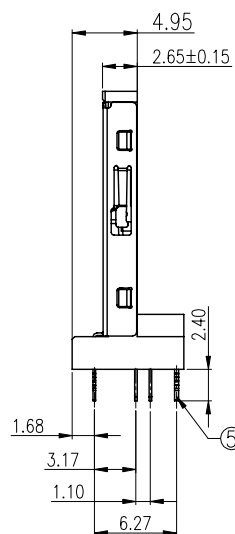


PIN#	DESCRIPTION
1	DAT2
2	CD/DAT3
3	CMD
4	V _{DD}
5	CLK
6	V _{SS}
7	DAT0
8	DAT1
9	CD
10	GND
11	/

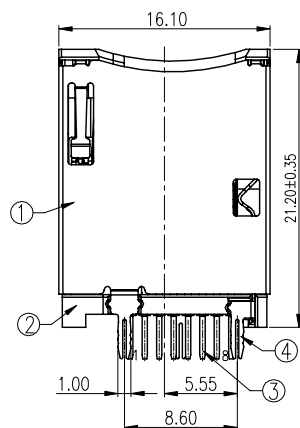

RECOMMENDED PCB LAYOUT
TOLERANCE=±0.05



6	CAP	1	LCP	UL94V-0, BLACK
5	BOARD LOCK	1	BRASS T=0.30mm	80u" TIN PLATING ON SOLDER TAIL AREA, UNDER PLATING 30u" NICKEL ALL OVER
4	CD PIN	1	PHOSPHOR BRONZE T=0.20mm	GOLD FLASH PLATED ON CONTACT AREA; 80u" TIN PLATING ON SOLDER TAIL AREA; UNDER PLATING 30u" NICKEL ALL OVER
3	CONTACT	8	PHOSPHOR BRONZE T=0.20mm	GOLD PLATED ON CONTACT AREA; 80u" TIN PLATING ON SOLDER TAIL AREA; UNDER PLATING 30u" NICKEL ALL OVER
2	HOUSING	1	LCP	UL94V-0, BLACK
1	SHELL	1	SUS T=0.20mm	30u" NICKEL PLATED
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X. ± 0.50
X. ± 0.38
.XX ± 0.25
.XXX ± 0.15
ANG ±

照片框

ORDER INFORMATION

TFC-D21M3BC-08-LF
SERIES
DIP 180°
LEADFREE
08 WAY
CAP
B TYPE
METAL FOOT X 3
HIGH 21.2mm

DESCRIPTION: MICRO SD CARD VERTICAL WITH PUSH DIP TYPE

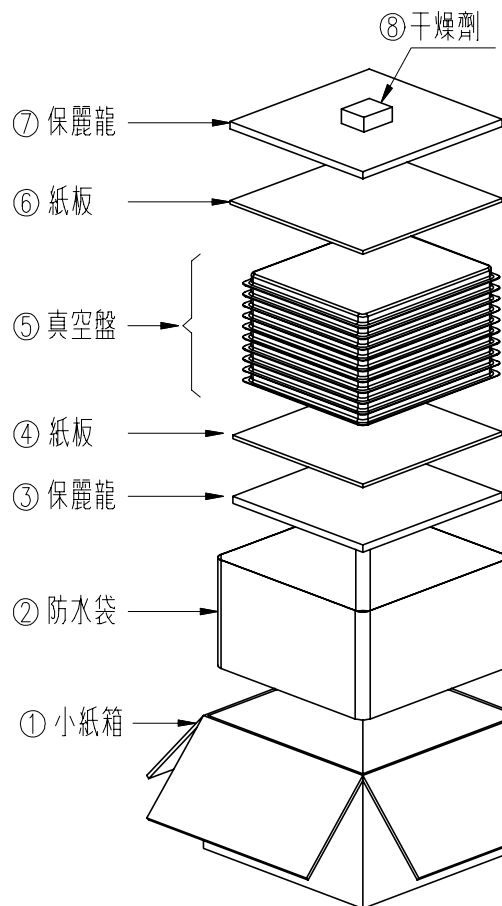


21 TRAY/CARTON

NOTES:

1: 48 PCS/TRAY

2: 1008 PCS/INNER CARTON

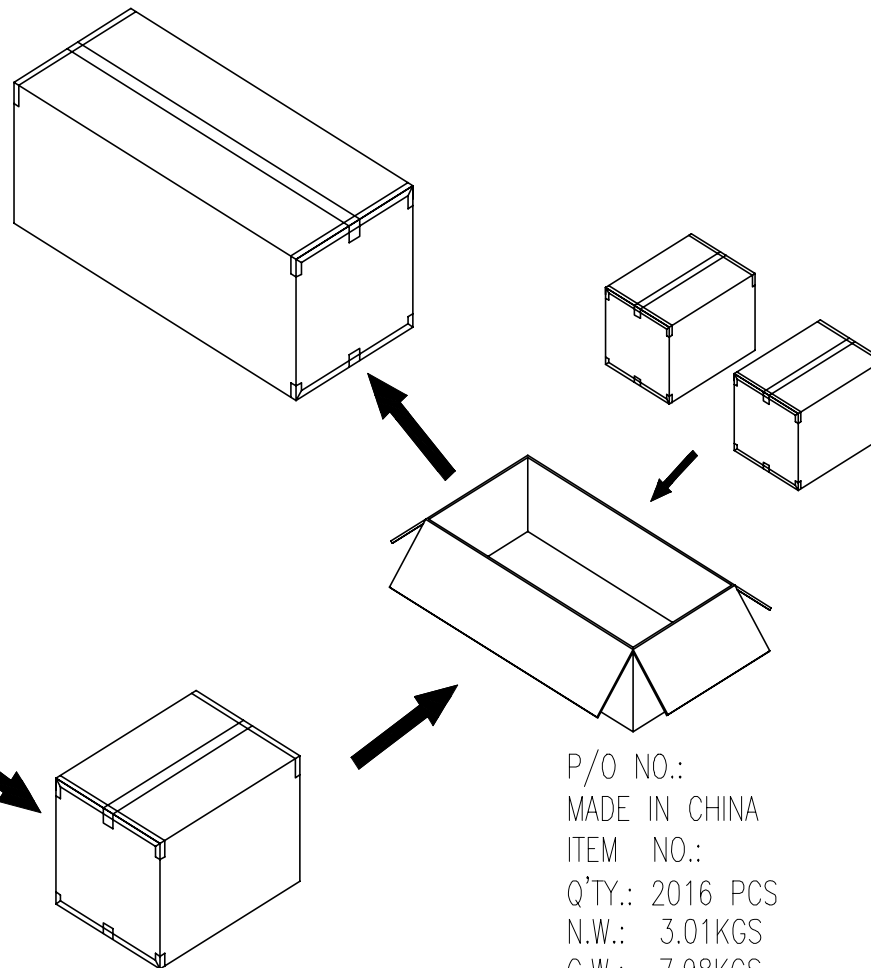

P/O NO.:
MADE IN CHINA
ITEM NO.:
Q'TY.: 2016 PCS
N.W.: 3.01KGS
G.W.: 7.98KGS
(490*350*295mm)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.38

.XX ± 0.25

.XXX ± 0.15

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

TFC-D21M3BCR-08-LF
SERIES | | | | | LEADFREE
DIP 180° | | | | | 08 WAY
HIGH 21.2mm | | | | | REEL
CAP | | | | | B TYPE
METAL FOOT X 3

DESCRIPTION: MICRO SD CARD VERTICAL WITH PUSH DIP TYPE