

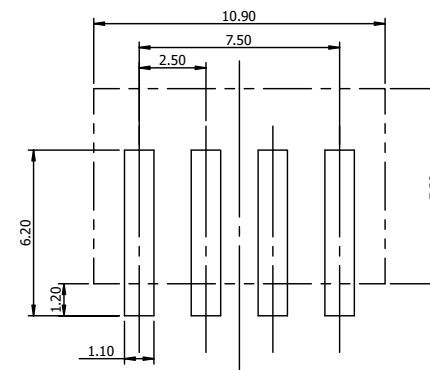
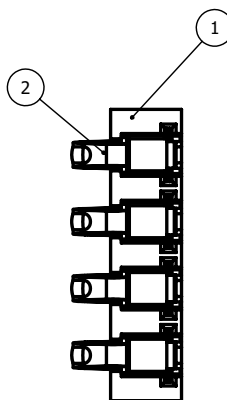
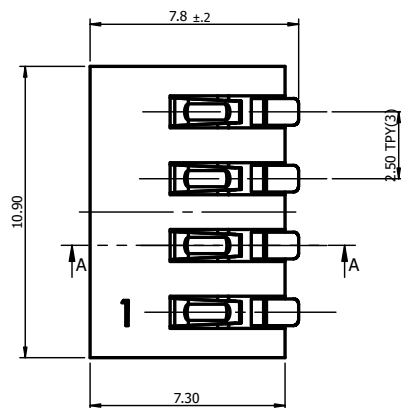




PCB LAYOUT (REF.)

NOTES:

- MATERIALS:
 - HOUSING: High Temp. Thermoplastic
 - TERMINAL: 0.2MM THICKNESS PHOSPHOR BRONZE ALLOY C5210R-SH
- CONTACT PLATING:
 - CONTACT AREA: PLATING WITH A 0.25-0.635 μ m Au MIN, OVERPLATING OVER 0.64-1.27 μ m Pd-Ni(80-20) MIN. ALL OVER 1.3-3.8 μ m Ni BARRIER PLATING
 - SOLDER TAIL: PLTING WITH A 2-5 μ m Sn, OVERPLATING OVER A 1.3-3.8 μ m Ni BARRIER PLATING
 - REST AREA: PLATING WITH A 1.3-3.8 μ m Ni BARRIER PLATING
- COPLANARITY TO BE 0.1MM MAX. FROM SETTING PLANE CONTACT TAILS AND THE HIGHEST ONE CAN NOT BE OVER THE DATUM A 0.05mm; THE LOWEST ONE CAN NOT BE BELOW THE DATUM A 0.1mm.

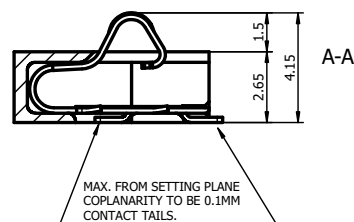

	CONTACT	4	COPPER ALLOY	Tin & Au Over Nickel	
	INSULATOR		HIGH Temp. Thermoplastic		
NO.	Description	Quantity	Material	Finish	Remark

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.20
.XX $\pm$ 0.10
.XXX $\pm$
ANG $\pm$ 3°

PPOJECTION



照片框

ORDER INFORMATION


BCS25-V26XR-04-LF

SERIES
180°SMT
LEADFREE
04 WAY
REEL
NON POST
HIGH 2.65mm


DESCRIPTION:

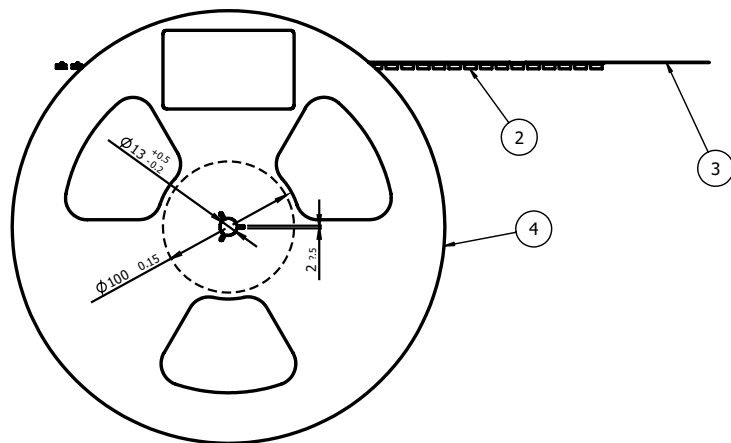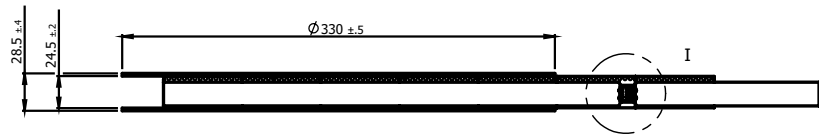

REEL 1:4

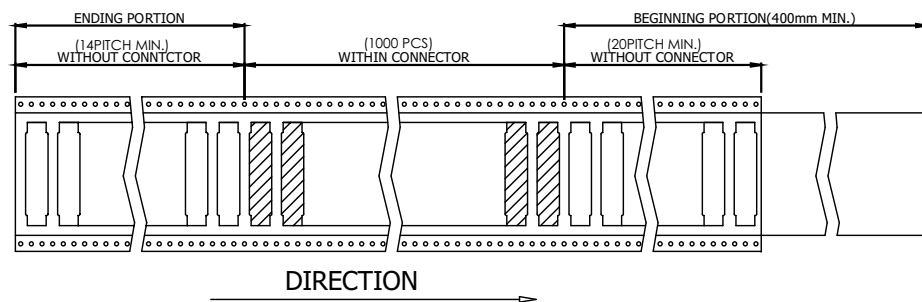


1. SUFFIX "-E1000" OF THE PART NUMBER INDICATES THAT 1000 PCS. CONNECTORS ARE ACCOMMODATED IN ONE REEL.
2. THE LABEL IS TO BE ATTACHED ON THE MAGAZINE AS SHOWN.
3. REFER. TO THE DRAWING, FOR THE DIMENSION OF THE CONNECTOR.

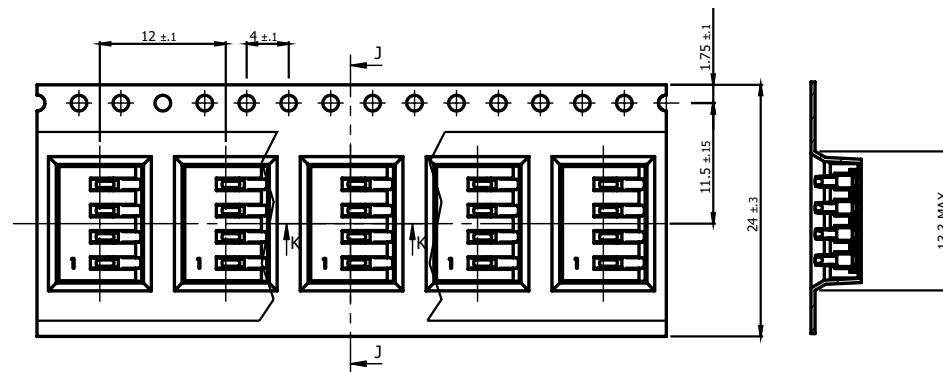

DETAIL I(2:1)

J-J (2 : 1)



K-K (2 : 1)

4	REEL	1	—	—
3	COVER-TAPE	—	PET	—
2	CARRIER-TAPE	—	PS	—
1	CONNECTOR	1000	—	—
ITEM	DESCRIPTION	COUNT	MATERIAL	FINISH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BCS25-V26XR-04-LF

SERIES | REEL | LEADFREE
180°SMT | NON POST | 04 WAY
HIGH 2.65mm

DESCRIPTION: