


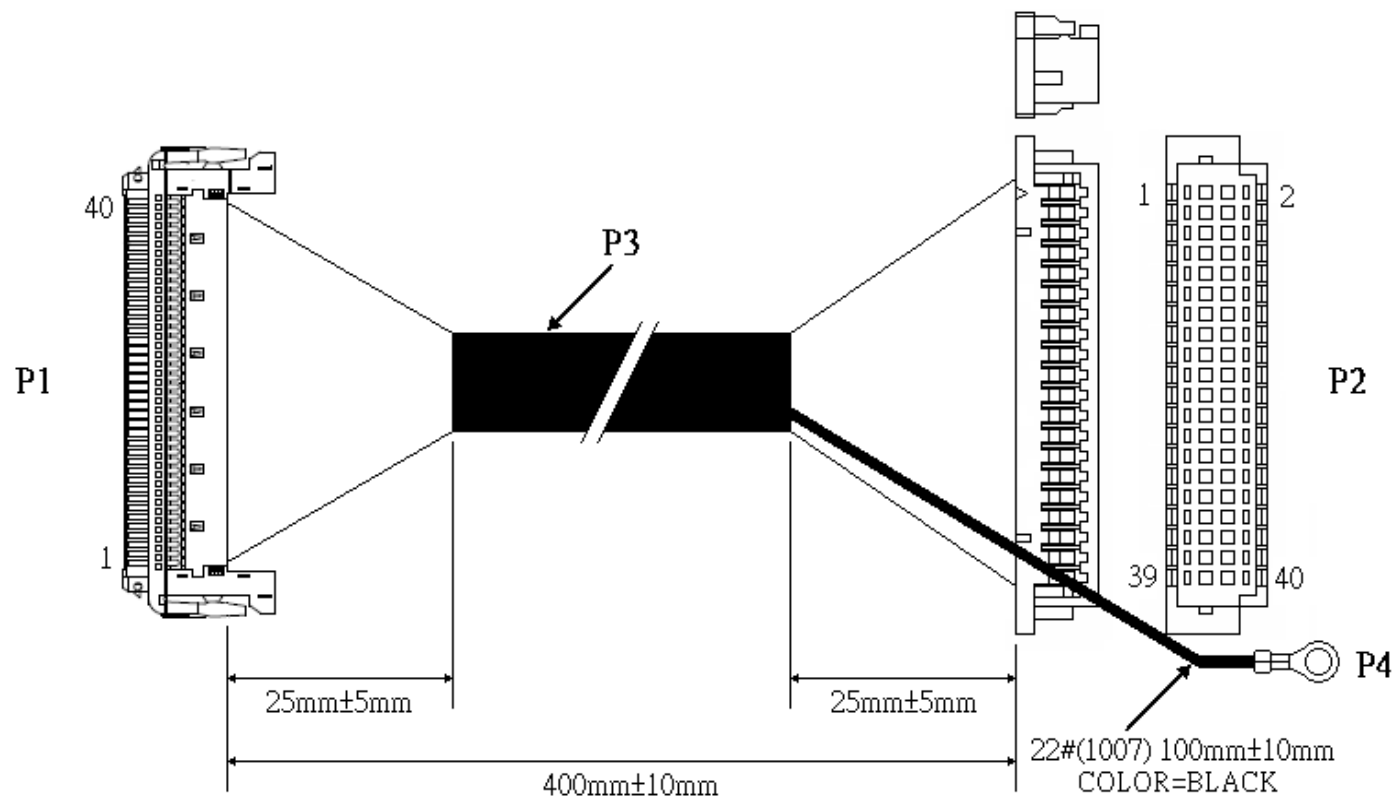

PIN OUT	
P1	P2 COLOR
1	9 BLUE
2	10 WHITE
3	11 BLUE
4	12 WHITE
5	13 BLUE
6	14 WHITE
7	8 BLACK
8	15 BLUE
9	16 WHITE
10	21 BLACK
11	17 BLUE
12	18 WHITE
13	19 BLUE
14	20 WHITE
15	22 BLACK
16	25 BLUE
17	26 WHITE
18	27 BLUE
19	28 WHITE
20	29 BLUE
21	30 WHITE
22	23 BLACK
23	31 BLUE
24	32 WHITE
25	24 BLACK
26	33 BLUE
27	34 WHITE
28	35 BLUE
29	36 WHITE
30	
31	
32	
33	7 BLACK
34	6 BLACK
35	5 BLACK
36	
37	4 RED
38	3 RED
39	2 RED
40	1 RED

1. P1 : 0.8mm PITCH CONNECTOR FINX-H-40 or EQUIVALENT
2. P2 : 1.25mm PITCH CRIMP TERMINAL AND HOUSING DF13-H-2X20 or EQUIVALENT
3. P3 : ACETATE CLOTH TAPE (OUTSIDE) COLOR=BLACK + EXPANDABLE SLEEVING IN COPPER BRAID (INSIDE)
4. P4 : RING TERMINAL Ø 3.2×6.0mm TIN PLATED CRIMP ON WIRE UL(1007) 22AWG 80°C 300V BLACK PVC JACKET
5. WIRE IS UL(1571) 30AWG 80°C 30V PVC JACKET

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DF13FINXRT-B2040322230-A40C

SERIES

400mm

FEMALE TO MALE

22,30 AWG

40 TO 40 TO 3.2Ø WAY

DESCRIPTION: WIRE HARNESS