
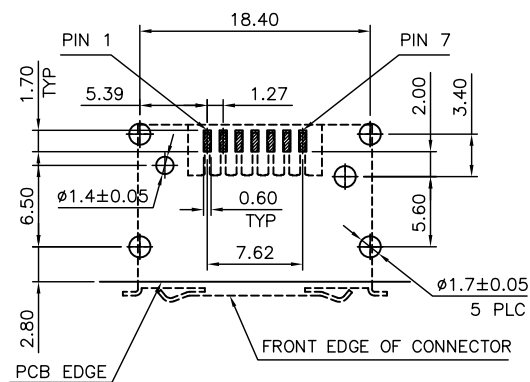
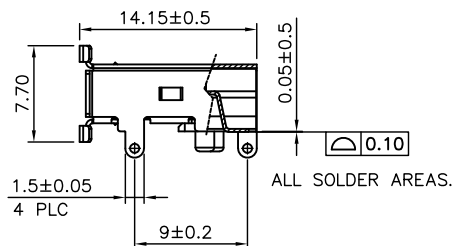


NOTE:

1. MATERIAL:
HOUSING: LCP WITH 30% GF, UL 94V-0, BLACK COLOR.
CONTACTS: PHOSPHOR BRONZE.
SHELL: BRASS.
2. FINISH:
CONTACTS: GOLD FLASH PLATED ON CONTACT AREA, [100μ"] MIN..
BRIGHT-TIN ON SOLDER TAIL, WITH ENTIRE CONTACT
UNDERPLATED [50μ"] MIN.. NICKEL.
SHELL: [50μ"] MIN. NICKEL UNDERPLATING OVER ALL.

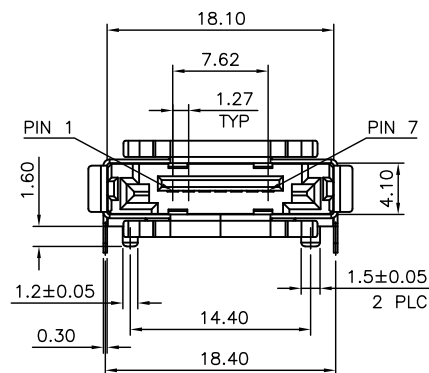

TOLERANCE: ±0.05,
RECOMMENDED PCB LAYOUT
(TOP VIEW)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

ESATA-PWA-07-LF

SERIES

LEADFREE

07 WAY

UPPER CONTACT

90°SMT

MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: ESATA-7P板下90° SMT-TYPE帶彈