
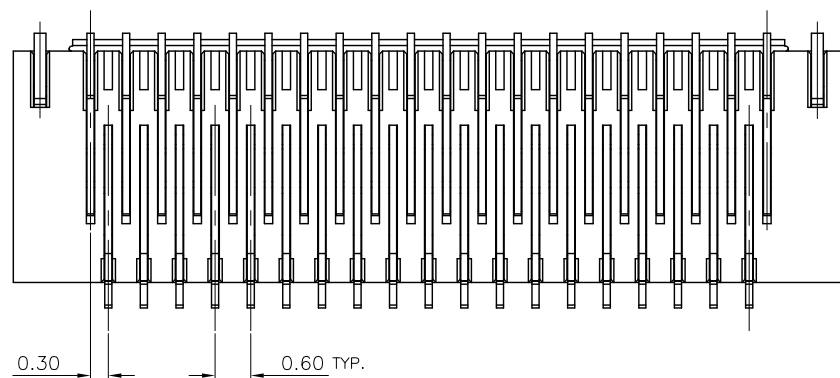
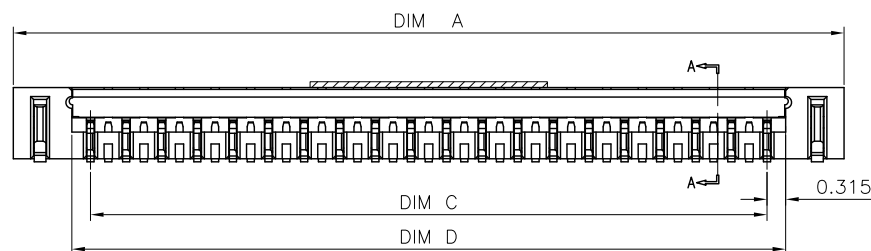


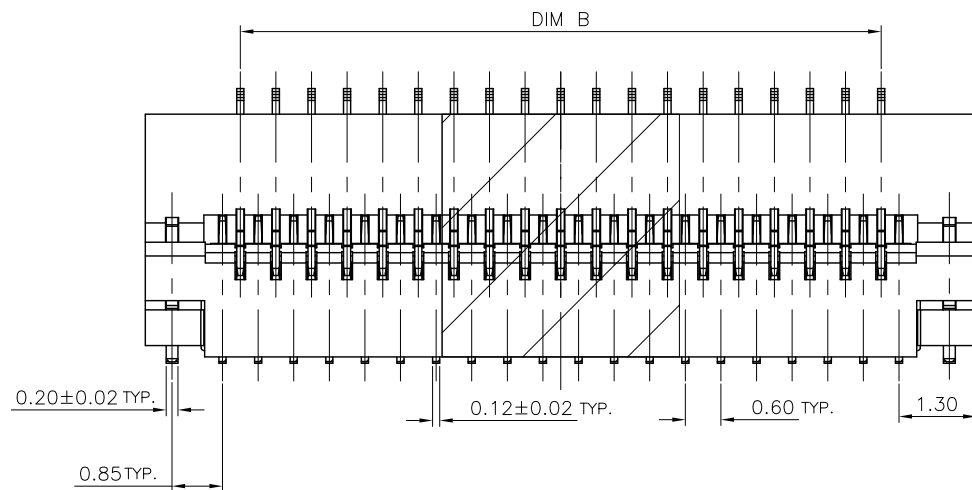

NOTES:

1. MATERIAL:

- 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,
UL94V-0; COLOR:NATURAL.
- 1.2 ACTUATOR: THERMOPLASTIC, HIGH TEMP.,
UL94V-0; COLOR:BLACK.


- 1.3 CONTACT: COPPER ALLOY
- 1.4 FITTING NAIL: COPPER ALLOY

2. FINISH:

- 2.1 CONTACT:
UNDERPLATING: 50u" MIN. NICKEL OVERALL.
FINISH:SEE ORDER INFORMATION.

- 2.2 FITTING NAIL:
UNDERPLATING: 50u" MIN. NICKEL OVERALL.
FINISH:SEE ORDER INFORMATION.

3. REFLOW SOLDER CAPABLE TO 260°C
PER ACES SPEC.

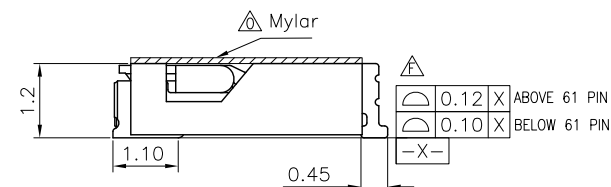

CKT	Dim A	Dim B	Dim C	Dim D	Dim E
11	5.60	2.40	3.00	3.63	3.60
15	6.80	3.60	4.20	4.83	4.80
17	7.40	4.20	4.80	5.43	5.40
21	8.60	5.40	6.00	6.63	6.60
23	9.20	6.00	6.60	7.23	7.20
25	9.80	6.60	7.20	7.83	7.80
31	11.60	8.40	9.00	9.63	9.60
33	12.20	9.00	9.60	10.23	10.20
39	14.00	10.80	11.40	12.03	12.00
41	14.60	11.40	12.00	12.63	12.60
51	17.60	14.40	15.00	15.63	15.60
61	20.60	17.40	18.00	18.63	18.60
71	23.60	20.40	21.00	21.63	21.60

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±




ORDER INFORMATION


FPT-WHB12-xx-LF

SERIES
LEADFREE
11~71 WAY
HIGH 1.2mm
BOTTOM CONTACT
HINGED ZIF

DESCRIPTION: 0.3 FPC CONN. ZIF EASY ON ASS'Y (H=1.2)




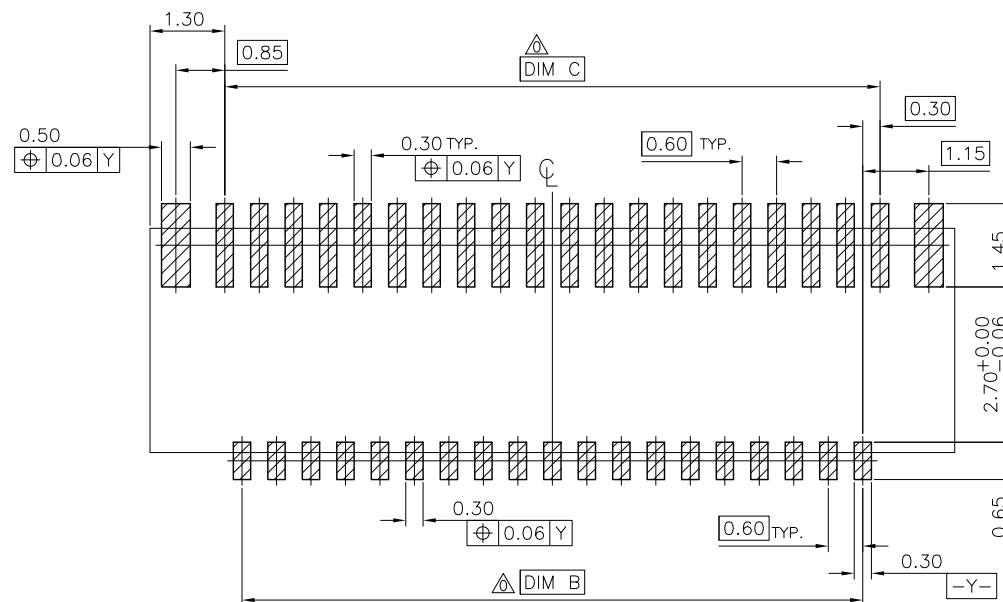


(TOLERANCE: $\pm 0.05\text{mm}$)



DESCRIPTION: 0.3 FPC CONN. ZIF EASY ON ASS'Y (H=1.2)

EVEN NUMBERS TYPE

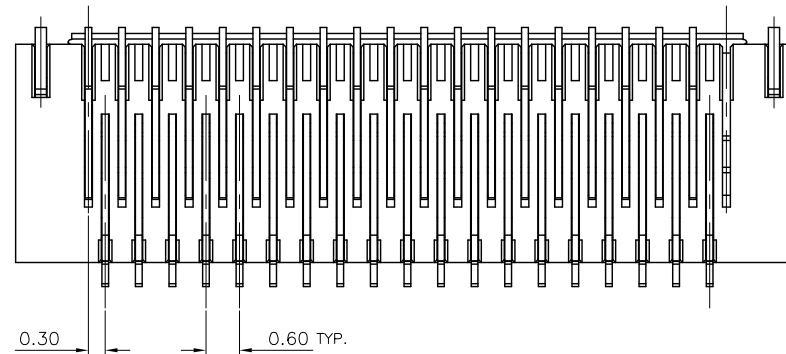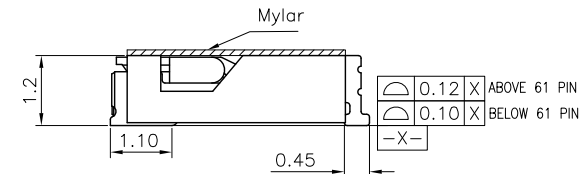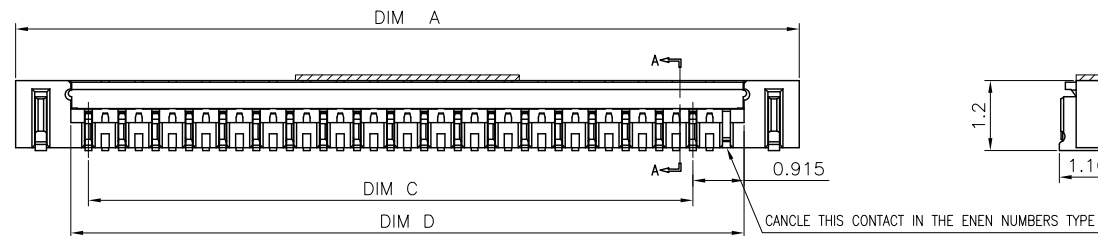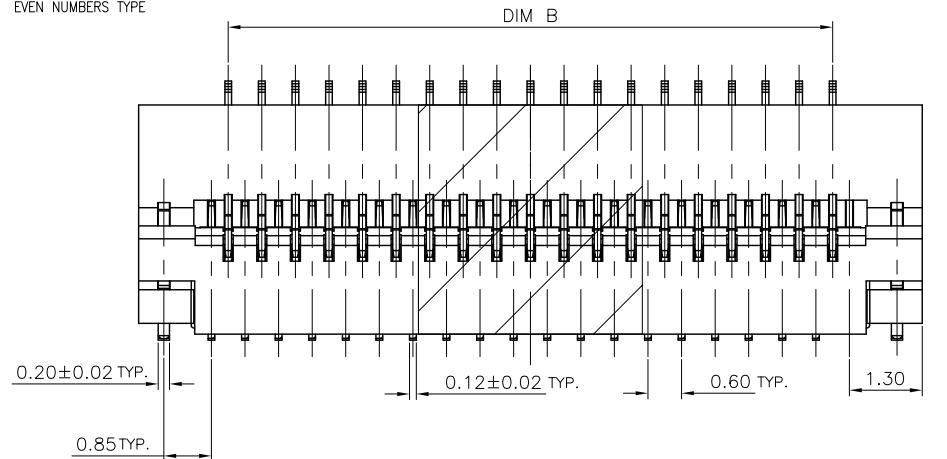

CKT	Dim A	Dim B	Dim C	Dim D	Dim E
60	20.60	17.40	17.40	18.63	18.60

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FPT-WHB12-xx-LF

SERIES
90°SMT
LEADFREE
11~71 WAY
HIGH 1.2mm
BOTTOM CONTACT
HINGED ZIF

DESCRIPTION: 0.3 FPC CONN. ZIF EASY ON ASS'Y (H=1.2)