

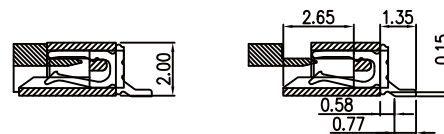

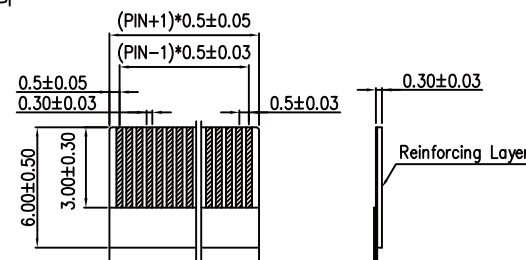


- SPEC :
- 1.Housing:High-Temp Plastic,UL94-V
Color:Natural
 - 2.Locker:High-Temp Plastic,UL94-V
Color:Black
 - 3.Contact:Phosphor Bronze
Initial:30m Ohms Max.
Voltage Rating:50V AC,DC
 - 4.Solder Tab:BRASS
 - 5.Temperature Rating:-25°C~+85°C
 - 6.Dielectric Withstanding Voltage:500V AC/Min



SECTION A-A

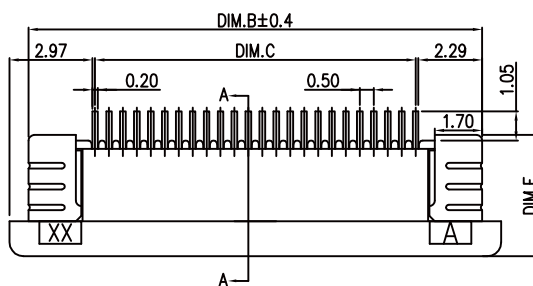

RECOMMENDED FFC/FPC DIM

● : 表示现有可提供PIN数

PIN	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E	PIN	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E
4	7.60	6.50	1.50	2.60		35	23.10	22.00	17.00	18.10	
5	8.10	7.00	2.00	3.10		36	23.60	22.50	17.50	18.60	
6	8.60	7.50	2.50	3.60		37	24.10	23.00	18.00	19.10	
7	9.10	8.00	3.00	4.10		38	24.60	23.50	18.50	19.60	
8	9.60	8.50	3.50	4.60		39	25.10	24.00	19.00	20.10	
9	10.10	9.00	4.00	5.10		40	25.60	24.50	19.50	20.60	
10	10.60	9.50	4.50	5.60		41	26.10	25.00	20.00	21.10	
11	11.10	10.00	5.00	6.10		42	26.60	25.50	20.50	21.60	
12	11.60	10.50	5.50	6.60		43	27.10	26.00	21.00	22.10	
13	12.10	11.00	6.00	7.10		44	27.60	26.50	21.50	22.60	
14	12.60	11.50	6.50	7.60		45	28.10	27.00	22.00	23.10	
15	13.10	12.00	7.00	8.10		46	28.60	27.50	22.50	23.60	
16	13.60	12.50	7.50	8.60		47	29.10	28.00	23.00	24.10	
17	14.10	13.00	8.00	9.10		48	29.60	28.50	23.50	24.60	
18	14.60	13.50	8.50	9.60		49	30.10	29.00	24.00	25.10	
19	15.10	14.00	9.00	10.10	5.2	50	30.60	29.50	24.50	25.60	5.75
20	15.60	14.50	9.50	10.60		51	31.10	30.00	25.00	26.10	
21	16.10	15.00	10.00	11.10		52	31.60	30.50	25.50	26.60	
22	16.60	15.50	10.50	11.60		53	32.10	31.00	26.00	27.10	
23	17.10	16.00	11.00	12.10		54	32.60	31.50	26.50	27.60	
24	17.60	16.50	11.50	12.60		55	33.10	32.00	27.00	28.10	
25	18.10	17.00	12.00	13.10		56	33.60	32.50	27.50	28.60	
26	18.60	17.50	12.50	13.60		57	34.10	33.00	28.00	29.10	
27	19.10	18.00	13.00	14.10		58	34.60	33.50	28.50	29.60	
28	19.60	18.50	13.50	14.60		59	35.10	34.00	29.00	30.10	
29	20.10	19.00	14.00	15.10		60	35.60	34.50	29.50	30.60	
30	20.60	19.50	14.50	15.60							
31	21.10	20.00	15.00	16.10							
32	21.60	20.50	15.50	16.60							
33	22.10	21.00	16.00	17.10							
34	22.60	21.50	16.50	17.60							

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPV-WZB2002-xx-LF

SERIES
90°SMT
ZIF
LEADFREE
04-60WAY
0.2mm PAD
HIGH 2.0mm
BOTTOM/CONTACT

DESCRIPTION: FPC 0.5PH 2.0H 抽尾貼下接