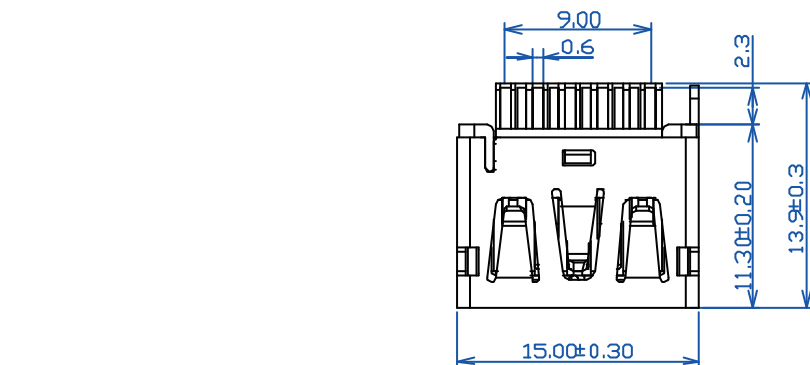


- ① PRODUCT: HDMI RECP. 19POS., SOLDER TYPE
- ② POSITIONS: 19 POSITIONS
- ③ COLOR OF INSULATOR: BLACK
- ④ CONTACT PLATING: NICKEL 50u" MIN UNDERPLATED OVER ALL, Sn-Cu PLATED 10D~150u" MIN. ON SOLDER TAIL, Au 30u" MIN. ON CONTACT AREA.
- ⑤ SHELL PLATING: SOLDERING NICKEL 100~200u" COVER Cu 100u" Min. Au 3u" OVER Ni 100u" AND Cu 50u" UNDERPLATED

4	INSULATOR	1		HI-TEMP.G.F., UL94 V-0
3	REAR COVER	1		HI-TEMP G.F UL94 V-0
2	CONTACT	19		COPPER ALLOY / Au PLATED
1	SHELL	1		COPPER ALLOY / NI OR Au 3u"
ITEM	NAME	Q'TY	PART #	MATERIAL / FINISH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.38

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XXX ± 0.13

DATE

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

HDMI-SS13-19-LF

SERIES | | LEADFREE
19 WAY
HIGH 13.9mm
SOLDER
FEMALE

DESCRIPTION: HDMI SERIES, RECP., 19 POS, SOLDER TYPE