

FEATURES:







- Half pitch 1.27mm(.050") series
- Centronic type female connector for P.C.B straight dip solder type
- Panel mount receptacle assemblies bracket with latch block
- Fully EMI/RFI shielded

MATERIALS:

- Housing: Plastic thermoplastic P.B.T UL94V-0 black
- Contact: Phosphor bronze gold selective plated
- Front Shell: Steel, Nickel plated over copper
- Latch: Steel, Nickel plated over copper
- Boardlock: Phosphor Bronze tin plated

ELECTRICAL:

- Current Rating: 1 Amp
- Insulation Resistance: 500M Ω /Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35m Ω Max
- Temperature Range: -55°C ~ +105°C

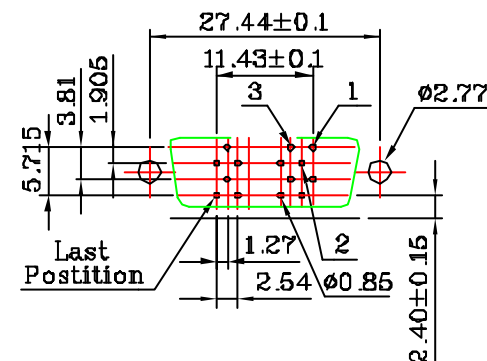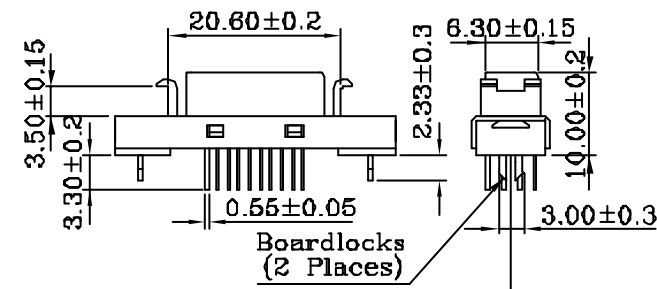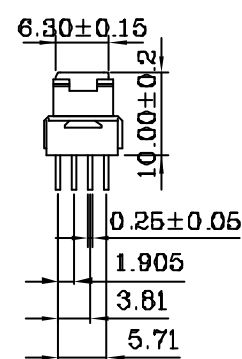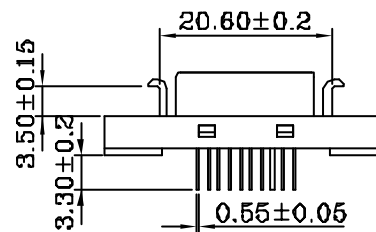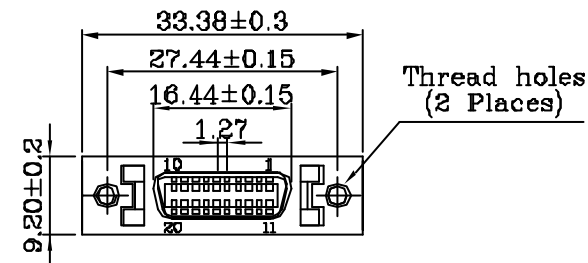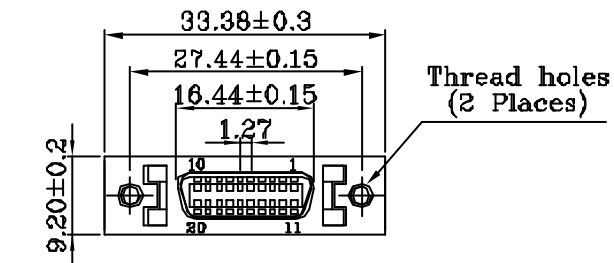

PC Board Mounting Dimensions

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HPC-SDL-020-LF
SERIES
LEADFREE
20 WAY
LOCK
DIP 180°
FEMALE

DESCRIPTION: 1.27mm(.050") Pitch Centronic 20P Female Connector Straight Dip Solder Type