
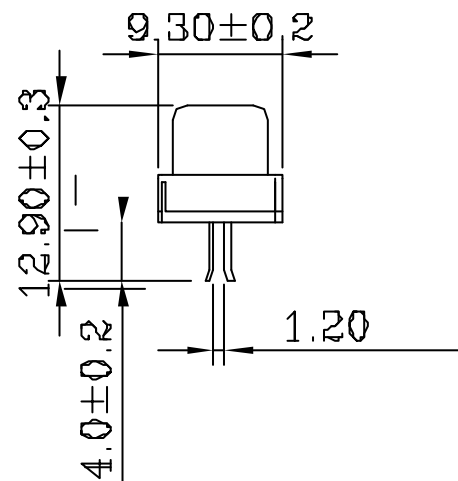
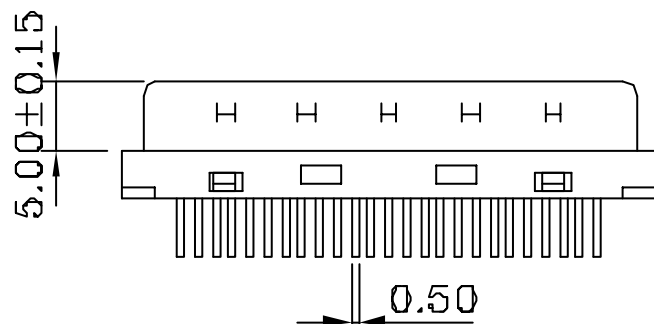


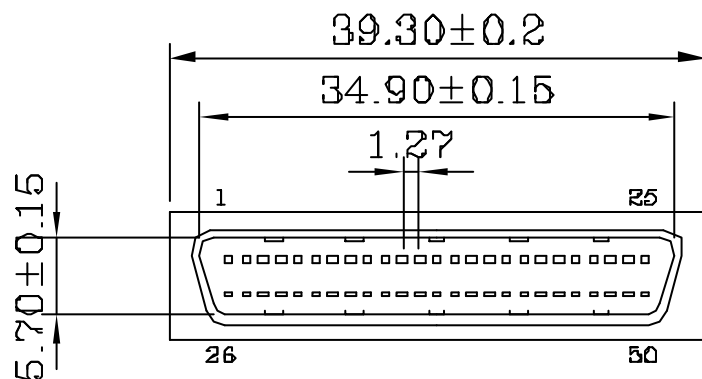

FEATURES:

- Half pitch 1.27mm(.050") series
- D-SUB type male connector for P.C.B clip S.M.T pitch 1.2mm or 1.6mm applicable to terminator and adaptor
- Assembly hood with plastic steel inner shell or Die-Cast metal hood
- Fully EMI/RFI shielded

MATERIALS:

- Housing: Plastic thermoplastic P.B.T UL94V-0 black
- Contact: Phosphor bronze gold selective plated
- Front Shell: Steel Nickel plated over copper

ELECTRICAL:

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -55°C ~ +105°C

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

ORDER INFORMATION

HPD-PE12-050-LF
SERIES | LEADFREE
50 WAY
EDGE 1.2mm
MALE

DESCRIPTION: 1.27mm Pitch D-SUB 50P Male Connector For P .C.B S.M.T