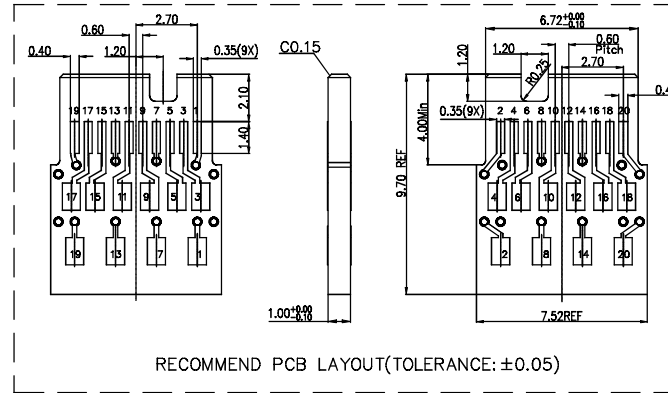
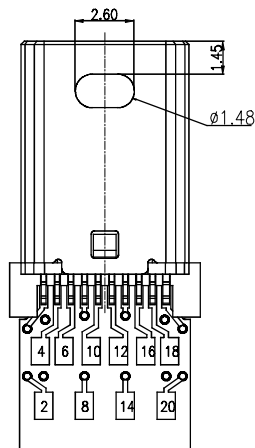
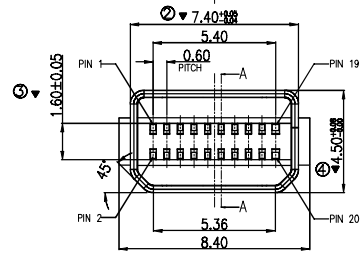
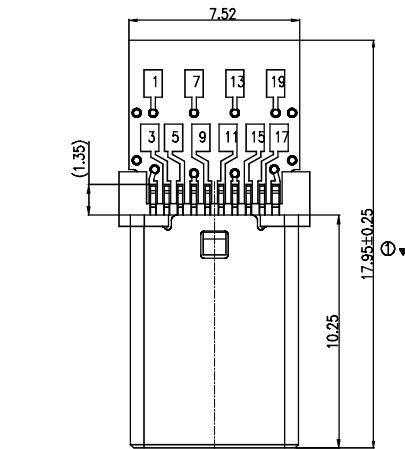


NOTES:

1. MATERIAL :
HOUSING : LCP E130I,UL94V-0, COLOR : NATURAL.
TERMINAL: PHOSPHOR BRONZE, THICKNESS=0.20mm.
SHELL: SPCC, THICKNESS=0.30mm.
PCB: SHALL BE 1OZ, COPPER CLAD BOTH SIDES, FR-4,
GFN0625AI/AIAC PER MIL-P-13949 IS PERMISSIBLE ERIAL.
AS ALTERNATE MAT
2. TERMINAL PLATING :
CONTACT AREA : Au PLATED AT CONTACT AREA
SOLDER TAIL : 100 u" BRIGHT TIN PLATED,
UNDER PLATE: 50 u" MINIMUM NICKEL (Ni).
SHELL PLATING :
100 u" MINIMUM NICKEL UNDER PLATED or G/F.
3. MARK"▼" DIMENSION MUST CONTROL,
MARK"⊙" IS DIMENSION No.
4. MARK"⊙" DIMENSION MUST CONTROL BY CPK.
MEETS THE REQUIREMENTS OF DIRECTIVE
2011/65/EU OF THE EUROPEAN PARLIAMENT
AND OF THE COUNCIL OF 03 JANUARY
2011 ON THE RESTRICTION OF THE USE OF
CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL
AND ELECTRONIC EQUIPMENT. (RoHS 2.0)
5. MEETS THE HALOGEN FREE.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ± 0.25
.XX ± 0.13
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

MDSP-PE10-20-LF

SERIES | LEADFREE
20 WAY
EDGE CLIP 1.0mm
MALE

DESCRIPTION: 20PIN MINI DISPLAY PORT PLUG ASSEMBLY(RoHS)