
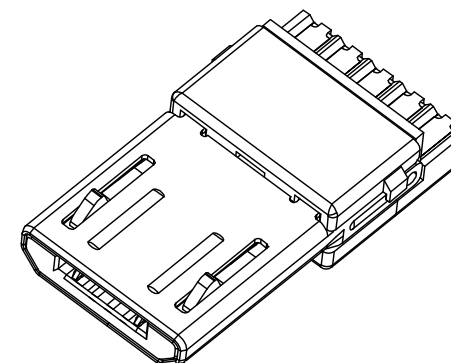
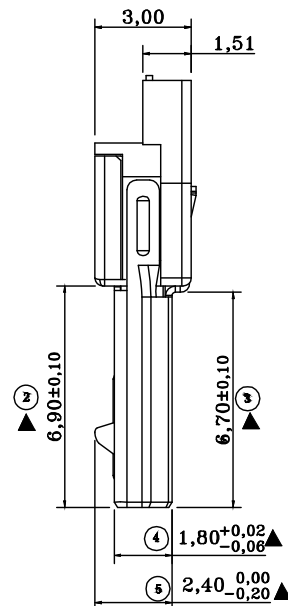


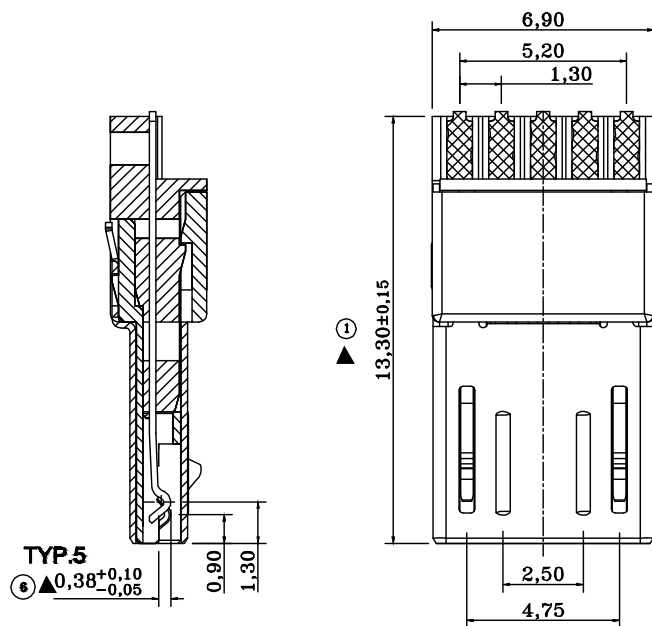

Note:

1. Material:

- 1.1 Housing: LCP GLASS FIBRE, UL94v-0
- 1.2 Contact-1: copper alloy, C5191 T=0.20mm
- 1.3 Contact-2: copper alloy, SUS304 T=0.40mm
- 1.4 Shell: copper alloy, C2680 T=0.20mm

2. Specification:


- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding
voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 50 mW Max.
- 2.4 Insulation resistance: 100 MW Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min. 0.81~2.05 Kgf Min. after 10000 insertion/extraction cycles
- 2.7 Temperature range: -30°C~80°C

3. 电镀:

- 3.1 SHELL: 镀镍80u"-120u"
- 3.2 CONTACT: 镍底50u"镀锡100u"接触部分按客户要求Ku"

4. 标"▲"为重点检验尺寸;

5. 未标示公差请查询公差表.

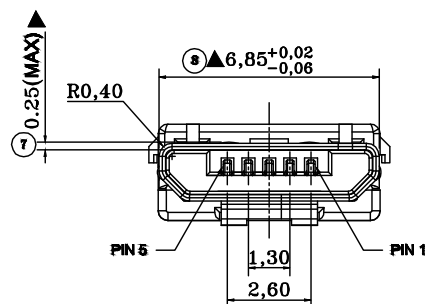

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MISB-PS-5B-LF





SERIES LEADFREE

5 PIN B TYPE

SOLDER

MALE

DESCRIPTION: MICRO USB 5P MALE (前五後五)

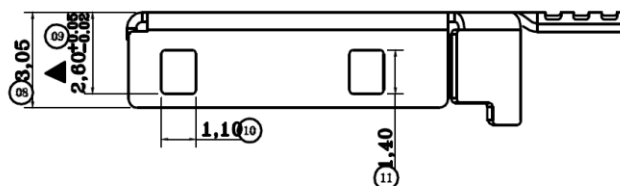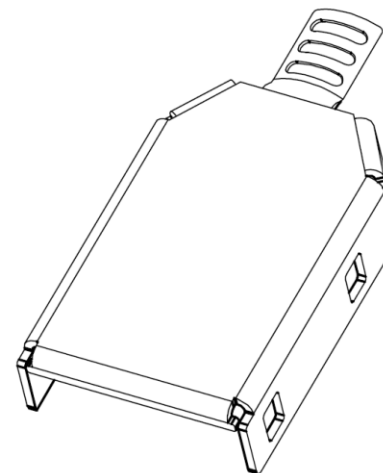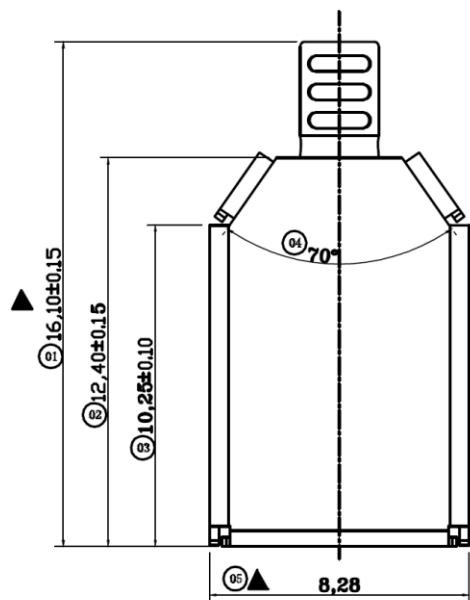

备注:

1. 材质: SPCC T=0.30±0.01mm;
2. 未标示公差请查询公差表;
3. 未标示导圆角均为R=0.15处理;
4. 最大毛头不得超过0.05mm;
5. 标"▲"为重点检验尺寸.
6. 电镀: 铜底50u", 镀镍80u"-120u"
盐雾要求过24H

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MISB-PS-5B-LF

SERIES






LEADFREE

5 PIN B TYPE

SOLDER

MALE

DESCRIPTION: MICRO USB 5P MALE B TYPE 上蓋

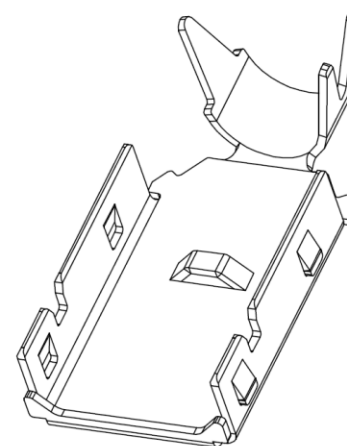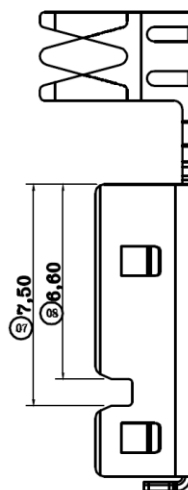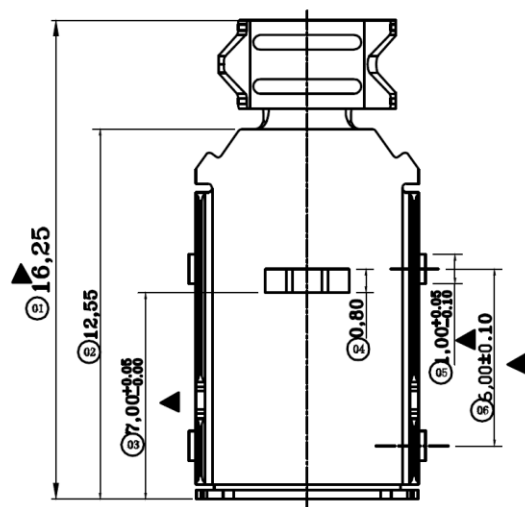

备注:

1. 材质:SPCC T=0.30±0.01mm;
2. 未标示公差请查询公差表;
3. 未标示导圆角均为R=0.15处理;
4. 最大毛头不得超过0.05mm;
5. 标"▲"为重点检验尺寸.
6. 电镀: 铜底50u", 镀镍80u"-120u"
盐雾要求过24H

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XXX ±

DATE

ANG ±

SIZE A4

PPOJECTION

ORDER INFORMATION

MISB-PS-5B-LF

SERIES

LEADFREE

5 PIN B TYPE

SOLDER

MALE

DESCRIPTION: MICRO USB 5P MALE B TYPE 下盖

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com