
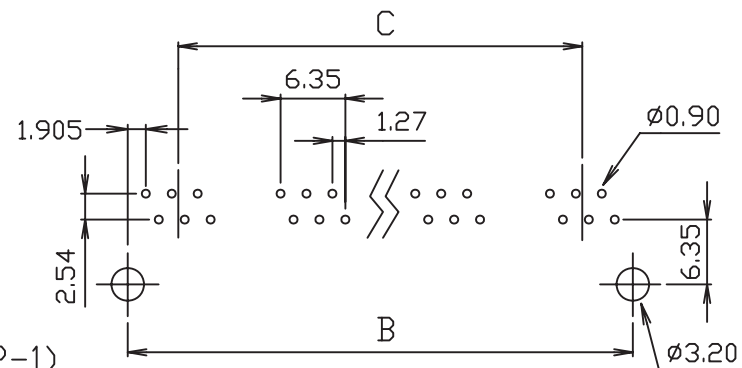

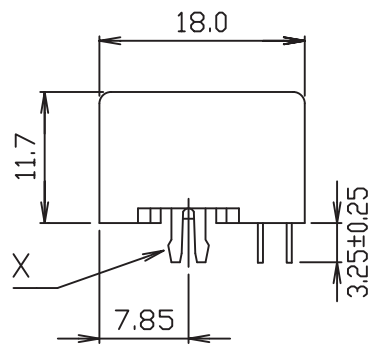


MATERIAL: HOUSING-PBT POLYESTER UL94V-0
MIXED GLASS FIBER.
STANDARD COLOR-BLACK
CONTACTS-0.45mm DIAMETER PHOS-BRONZE
PLATED WITH HARD GOLD.
CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

P=NUMBER OF PORTS

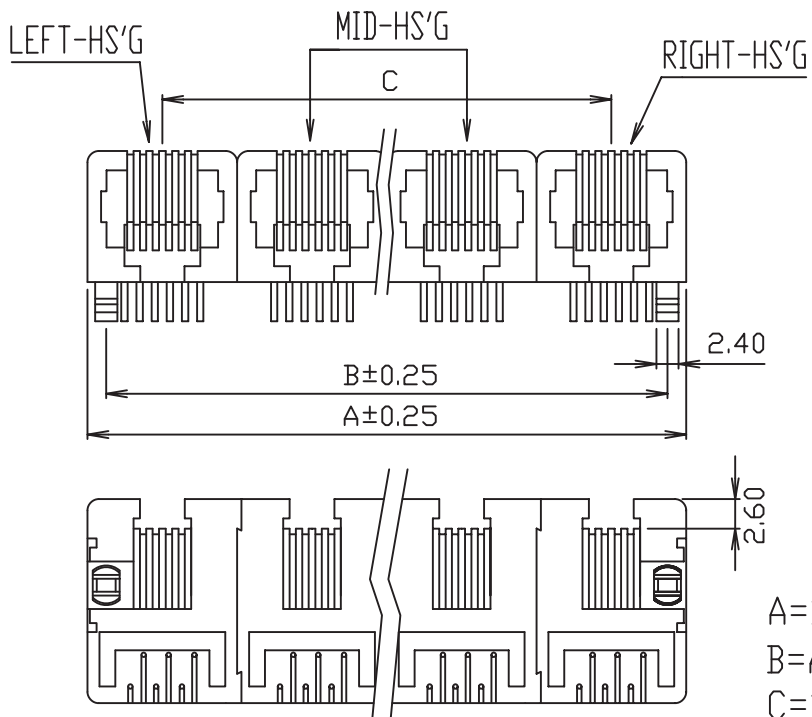

PC Board Layout

$$\begin{aligned} A &= 13.2(\text{m/m}) \times P - 0.50(\text{m/m}) \times (P - 1) \\ B &= A - 3.04(\text{m/m}) \\ C &= 12.7(\text{m/m}) \times (P - 1) \end{aligned}$$

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

 $X_{\pm}$

CHECKED BY GENIUS

 $\cdot XX \pm$

UNIT / mm	SCALE 1 : 1
-----------	-------------

ANG ±

DATE _____

PPROJECTION 

照片框

ORDER INFORMATION

MJ11Ax-KX06-0606-LF

SERIES					LEADFREE
--------	--	--	--	--	----------

6P6C

2-PORTS	6u" GOLD NON EAP
---------	---------------------

4:4PORTS BLACK



MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

SIZE A4

PPROJECTION 

DESCRIPTION: 6 POSITION SIDE ENTRY VERY LOW PROFILE, GANGED JACK FROM 2 PORTS UP.