
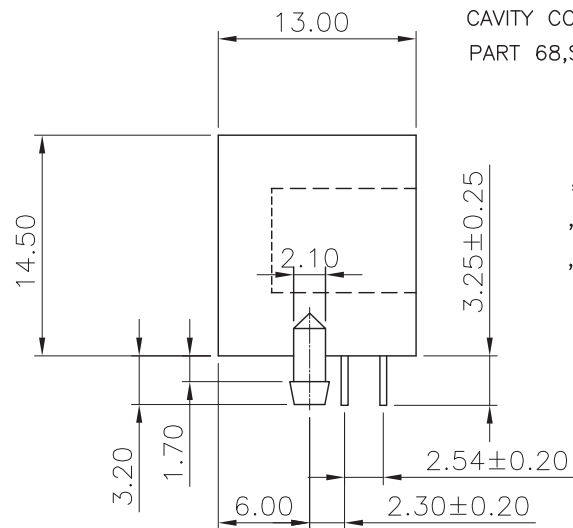


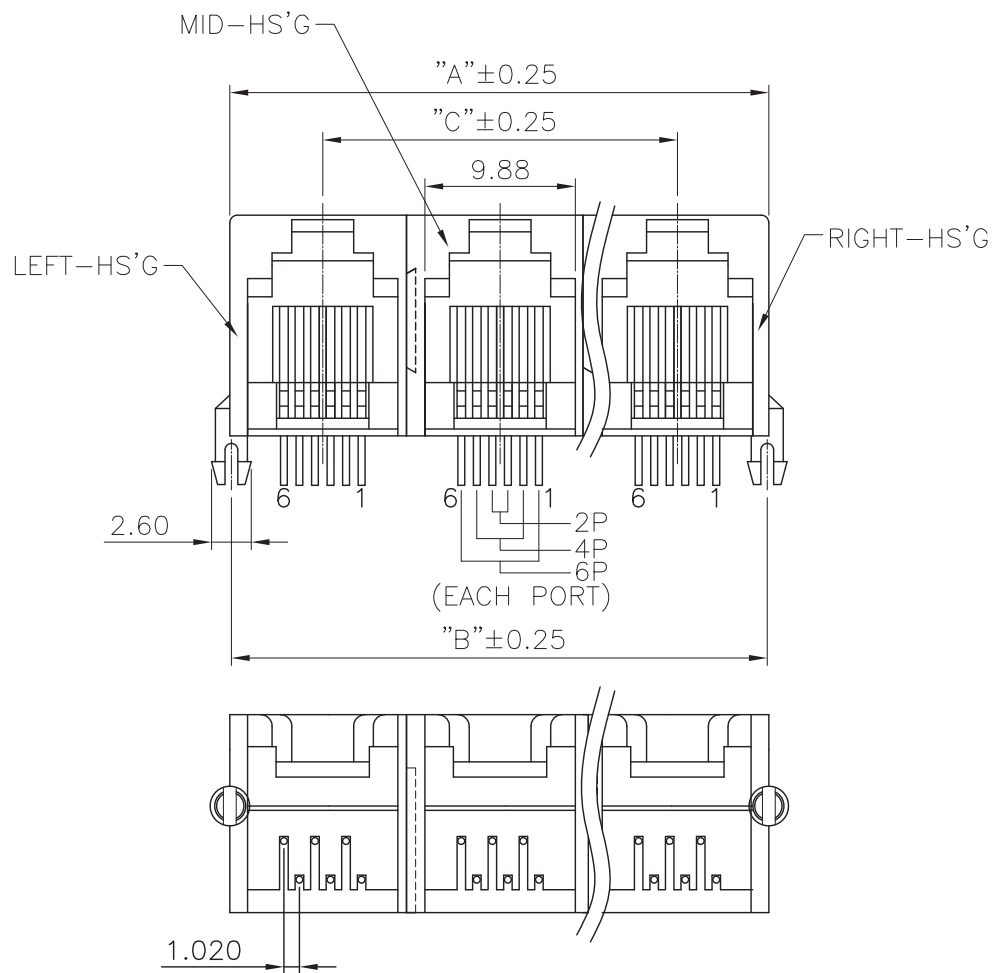


MATERIALS:

- HOUSING—PBT POLYESTER UL94V-0 MIXED GLASS FIBER. STANDARD COLOR—GRAY.
- CONTACTS—0.45mm DIAMETER PHOS-BRONZE PLATED WITH HARD GOLD.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

$$\begin{aligned} "A" &= 11.65(\text{m/m})XP + 0.60(\text{m/m}) \\ "B" &= 11.65(\text{m/m})XP + 0.30(\text{m/m}) \\ "C" &= 11.65(\text{m/m})X(P-1) \\ P &= \text{NUMBER OF PORTS} \end{aligned}$$

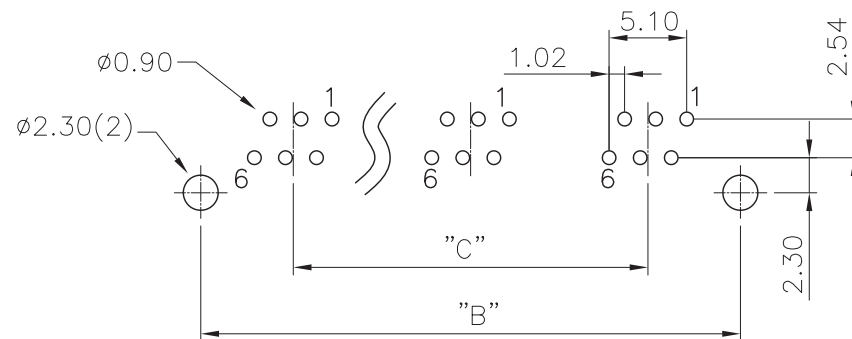

PCB LAYOUT
Ref.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

MJ14Ax-GX06-0606-LF

SERIES

2:2 PORTS

...

LEADFREE

6P6C

06u" GOLD

NON EAR

GRAY

DESCRIPTION: RJ11, 2PORTS, MINI LOW PROFILE GANGE, SIDE ENTRY PCB JACK.