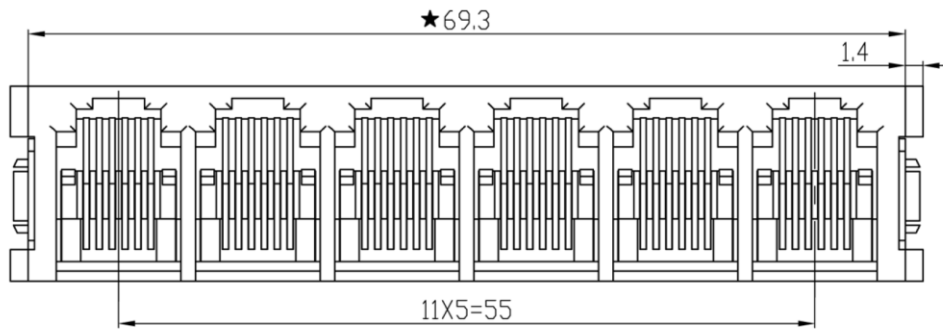
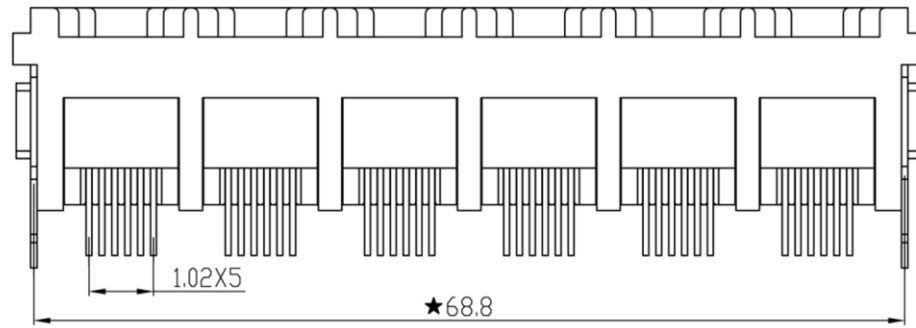


PC Board Layout

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 50Hz or 60Hz, 1MIN.

MECHANICAL:


1. HOUSING & INSERT MATERIAL : PBT UL94V-0.
2. CONTACT MATERIAL : DIAMETER 0.45MM PHOSPHOR BRONZE
GOLD PLATING OVER NICKEL.
3. METAL PEG MATERIAL : IRON/PHOSPHOR BRONZE T=0.4mm WITH TIN PLATED.
4. MATING/UNMATING FORCE : 2.2KG. F MAX.
5. RETENTION STRENGTH : 7.7KG. F MIN BETWEEN JACK AND PLUG.
6. OPERATING LIFE : 600 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE : -10°C ~ +40°C RELATIVE HUMIDITY<70%.
2. OPERATION : -40°C ~ +70°C.

Remark:

1. Tolerances Unless Otherwise Specified
.0±0.25 .00±0.20 .000±0.10
2. The mark with ★ is the key inspection dimension for QC

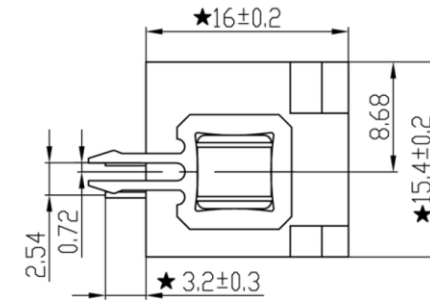

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MJD15A6-GE01Z-0606-LF

SERIES

GRAY

CLIP


GOLD FLASH

EAR


6P6C

LEADFREE


DESCRIPTION:




① 产品 (Product)




② 上盖 (Cover)

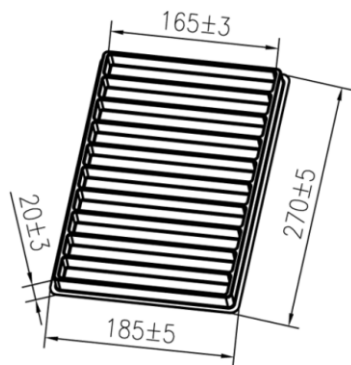

③ 底盖 (Base)

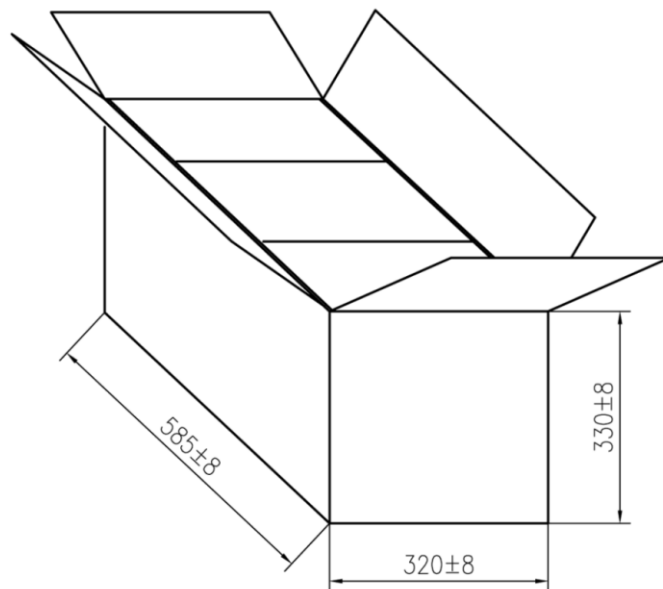

④

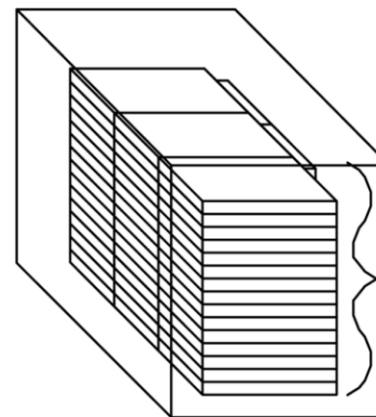

透视图 (Scenograph)

产品 (Product)
真空盒共3列16层边上
竖2盒

序号 (NO.)	名称 (Name)	型号规格 (Model) 长X宽X高 (MM) (LongXWideXHigh)	装箱规格 (Pack Specirication)	
4	纸箱 (Cardboard box)	585x320x330	Q' TY	50盒/箱 (Tray/CTN)
3	底盖 (Base)	270x185x20		20PCS/盒 (Dish)
2	上盖 (Cover)	272x187x23	NW: 13 KGS	
1	产品 (Product)	69.3X15.4X16	GW: 16 KGS	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MJD15A6-GE01Z-0606-LF

SERIES

GRAY

EAR

CLIP

GOLD FLASH

6P6C

LEADFREE

DESCRIPTION: