
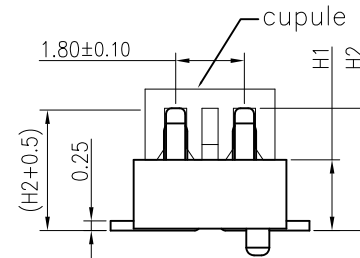




NOTES:

- HUOSINGT: HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BEIGE
- TERMINAL:PHOSPHOR BRONZE
PLATING:1μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.

MATING HEIGHT	4.0
MALE H1	1.85
FEMALE H2	2.05
MALE H2	3.20

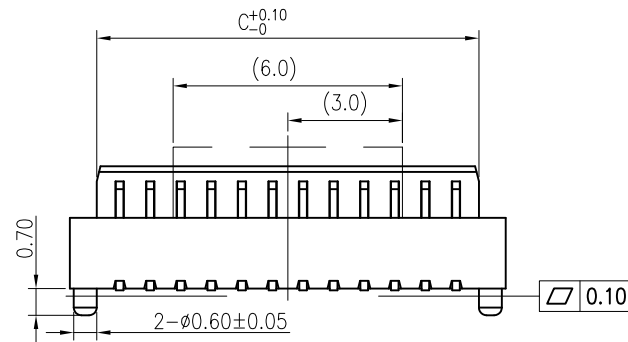

PIN	Dimensions				PIN	Dimensions			
	A	B	C	C		A	B	C	C
8(2*4)	5.0	2.4	3.6	4.2	34(2*17)	15.4	12.8	14.0	14.6
10(2*5)	5.8	3.2	4.4	5.0	36(2*18)	16.2	13.6	14.8	15.4
12(2*6)	6.6	4.0	5.2	5.8	38(2*19)	17.0	14.4	15.6	16.2
14(2*7)	7.4	4.8	6.0	6.6	40(2*20)	17.8	15.2	16.4	17.0
16(2*8)	8.2	5.6	6.8	7.4	42(2*21)	18.6	16.0	17.2	17.8
18(2*9)	9.0	6.4	7.6	8.2	44(2*22)	19.4	16.8	18.0	18.6
20(2*10)	9.8	7.2	8.4	9.0	46(2*23)	20.2	17.6	18.8	19.4
22(2*11)	10.6	8.0	9.2	9.8	48(2*24)	21.0	18.4	19.6	20.2
24(2*12)	11.4	8.8	10.0	10.6	50(2*25)	21.8	19.2	20.4	21.0
26(2*13)	12.2	9.6	10.8	11.4	52(2*26)	22.6	20.0	21.2	21.8
28(2*14)	13.0	10.4	11.6	12.2	54(2*27)	23.4	20.8	22.0	22.6
30(2*15)	13.8	11.2	12.4	13.0	56(2*28)	24.2	21.6	22.8	23.4
32(2*16)	14.6	12.0	13.2	13.8	58(2*29)	25.0	22.4	23.6	24.2
34(2*17)	15.4	12.8	14.0	14.6	60(2*30)	25.8	23.2	24.4	25.0

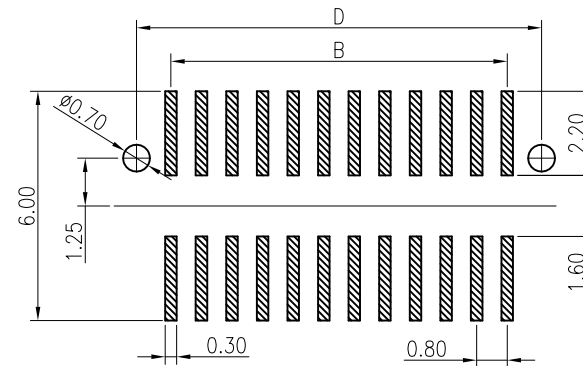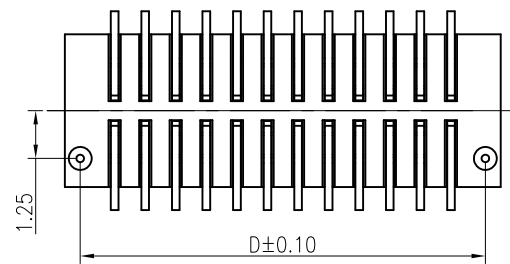

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ±

ANG ±

SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

NP08K-P18P-xxx-LF

SERIES

LEADFREE

008~60WAY

POST

UNMATED HIGH 1.8mm

PLUG

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: