

NOTES:

1. MATERIAL:

- 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,
UL94V-0;
COLOR: SEE PART NO..

1.2 CONTACTS: COPPER ALLOY.

1.3 CLIP: COPPER ALLOY.

2. FINISH:

2.1 CONTACT:

SELECTIVE GOLD PLATING ON CONTACT AREA.

100μ" MIN. MATTE TIN PLATING ON SOLDER TAILS,


50μ" MIN. NICKEL UNDERPLATING OVERALL.

2.2 CLIP:





100μ" MIN. MATTE-TIN OVER 50μ" MIN NICKEL PLATING.

3. PRODUCT SPEC.: PS-3GIO-01

4. PACKING SPEC.: 318304001

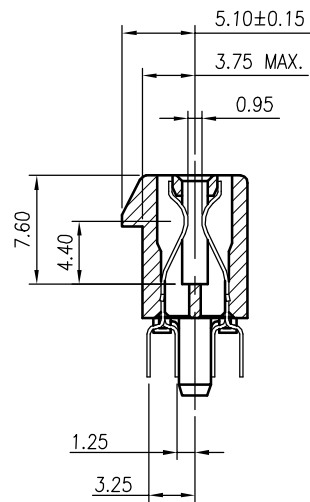

SECTION F-F

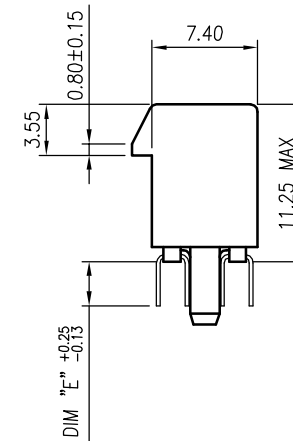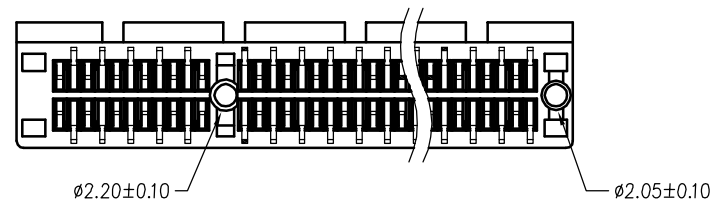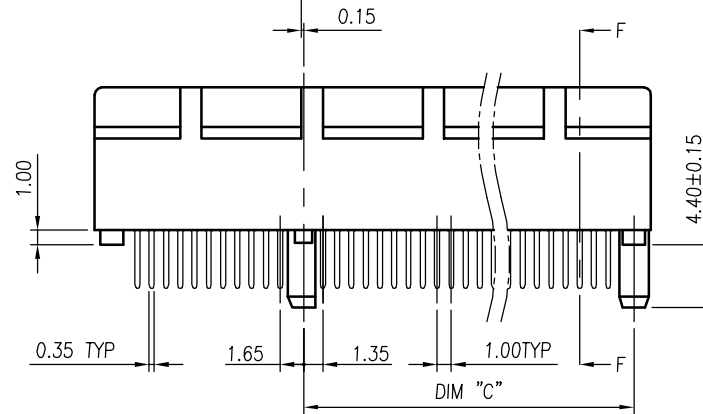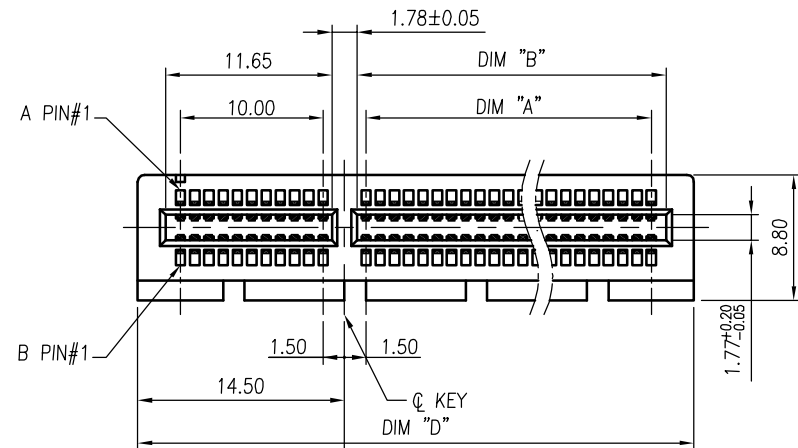

DIM E	PCB THICKNESS	DIM F
2.30	1.56	1.7
3.10	2.36	2.5

DIMENSIONS				
POSITION	A ±0.10	B $\begin{smallmatrix} +0.15 \\ -0.05 \end{smallmatrix}$	C ±0.20	D ±0.23
36	6	7.65	9.15	25.00
64	20	21.65	23.15	39.00
98	37	38.65	40.15	56.00
164	70	71.65	73.15	89.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.40
X. ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

PCIX-DPBxx-xxx-LF

SERIES

LEADFREE


036~164 WAY

B15:PCB THICKNESS 1.56mm


B23:PCB THICKNESS 2.36mm

POST
DIP 180°


DESCRIPTION:

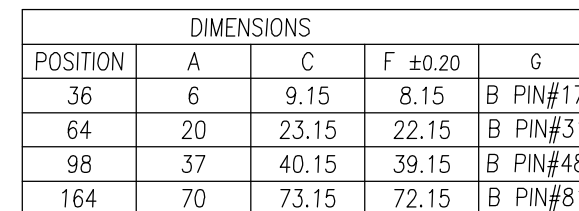[illegible]

RECOMMENDED PCB LAYOUT
POST TYPE & CLIP TYPE

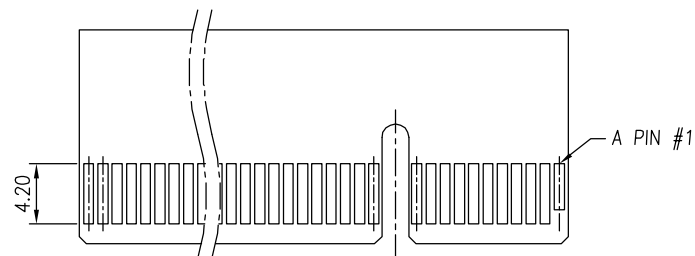 1.47 ± 0.13 

I/O PANEL DIRECTION →
SECONDARY (SOLDER) SIDE
ADD-IN CARD EDGE-FINGER DIMENSIONS



MORE THAN ALL
CONNECTORS
ASSEMBLIES

PART NO. PCIX-DBxx-xxx

DWG NO. PCIX-DBxx-xxx

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

	X. ±
	.X ±
	.XX ±
	.XXX ±
	ANG

DESCRIPTION:




PCI EXPRESS 1.0mm
CARD EDGE ASSY'

AREA

REVISIONS

DATE _____


煜倫股份有限公司

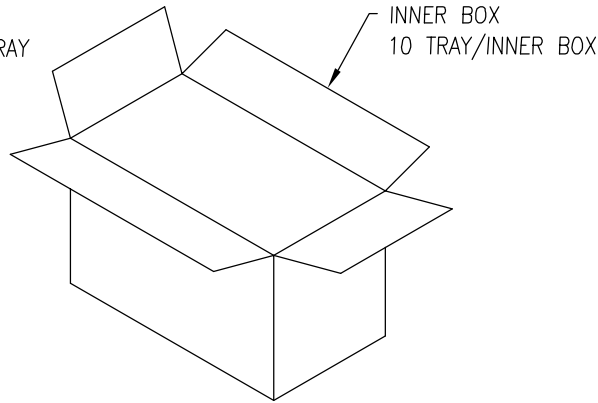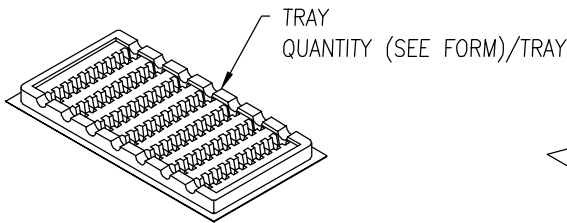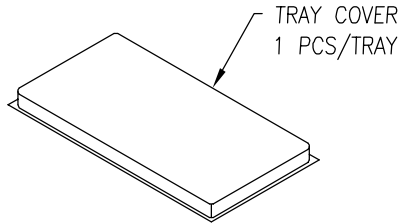

Form				
	36P	64P	98P	164P
TRAY	70 Pcs	60 Pcs	40 Pcs	30 Pcs
INNER BOX	700 Pcs	600 Pcs	400 Pcs	300 Pcs
CARTON	2100 Pcs	1800 Pcs	1200 Pcs	900 Pcs
NET WEIGHT	5.6 Kg	7.3 Kg	7.0 Kg	8.2 Kg
GROSS WEIGHT	7.6 Kg	9.3 Kg	9.0 Kg	10.2 Kg

NOTES:

1. TRAY COVER SIZE: 329.5mm(L)X 170mm(W)X 20mm(H).
2. TRAY SIZE: 328.5mm(L)X 169mm(W)X 20mm(H).
3. INNER BOX SIZE: 340mm(L)X 187mm(W)X 210mm(H).
4. CARTON SIZE: 576mm(L)X 350mm(W)X 232mm(H).

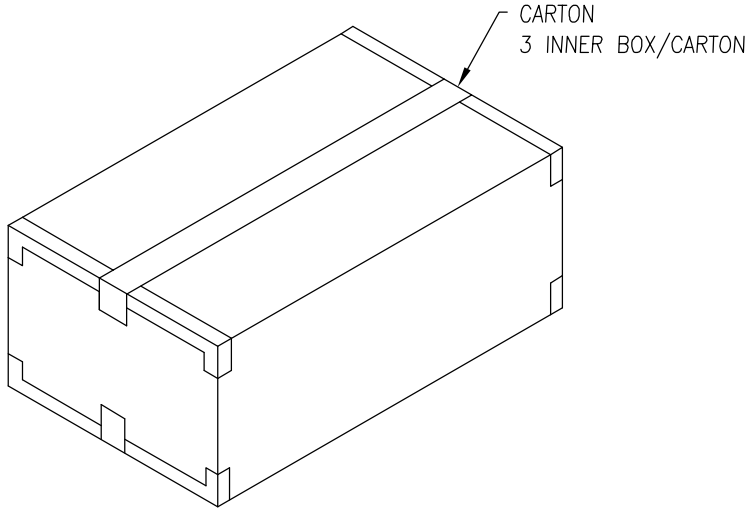

SHIPPING CARTON

MORETHANALL CONNECTORS ASSEMBLIES 煜倫股份有限公司	PART NO. PCIX-DBxx-xxx		TOLERANCES ARE X. ± .X ± .XX ± .XXX ± ANG		DESCRIPTION:	PCI EXPRESS 1.0mm CARD EDGE ASSY'			
	DWG NO. PCIX-DBxx-xxx								
	FILE NO.				DRAWING BY	AREA	REVISIONS		DATE
	UNIT / mm	SCALE 1:1	PROJECTION 						