

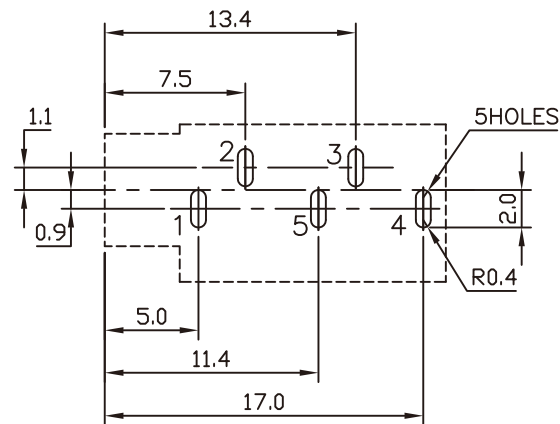


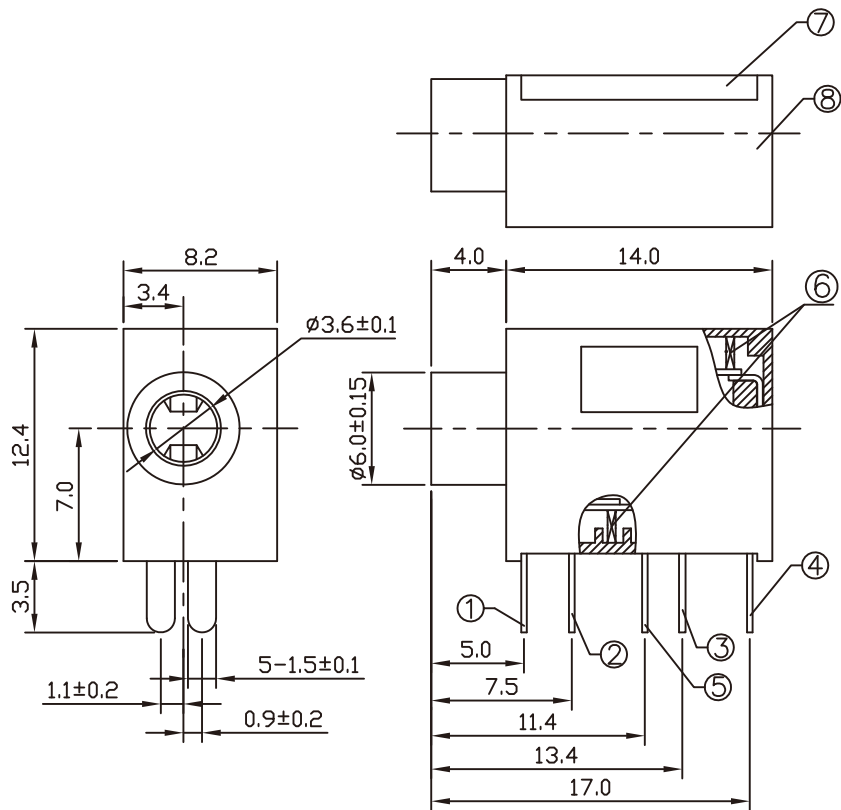

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-top view)

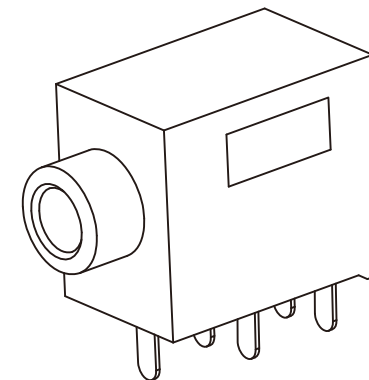

SCHEMATIC				
PJ-R12Pxx-05C	PJ-R12Pxx-04R	PJ-R12Pxx-04L	PJ-R12Pxx-03	PJ-R12Pxx-03B

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

MODEL NO.	COLOR
PJ-R12PGR-xxx	GREEN
PJ-R12PRD-xxx	RED
PJ-R12PBL-xxx	BLUE
PJ-R12POR-xxx	ORANGE

8	HOUSING	1	PBT 4815	UL-94V0
7	COVER	1	PBT 4815	UL-94V0
6	SPRING	2	SWC $\phi 0.30$	
5	CURVE PIECE	1	C2680 $t=0.30$	MB:Ni Ag PLATED
4	CURVE PIECE	1	C2680 $t=0.30$	MB:Ni Ag PLATED
3	SPRING PIECE	1	C2680 $t=0.30$	MB:Ni Ag PLATED
2	SPRING PIECE	1	C2680 $t=0.30$	MB:Ni Ag PLATED
1	CONTACT FOOT	1	C5191 $t=0.30$	MB:Ni Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PJ-R12Pxx-xxx-LF
SERIES | LEADFREE
DIP 90° | SCHEMATIC
HIGH 12.3mm | GR:GREEN
ALL PLASTIC | RD:RED
BL:BLUE
OR:ORANGE

DESCRIPTION: MINIATURE JACK