

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	3.96±0.10	7.92	11	39.60±0.25	43.56
3	7.92±0.15	11.88	12	43.56±0.25	47.52
4	11.88±0.15	15.84	13	47.52±0.30	51.48
5	15.84±0.15	19.80	14	51.48±0.30	55.44
6	19.80±0.20	23.76	15	55.44±0.30	59.40
7	23.76±0.20	27.72	16	59.40±0.30	63.36
8	27.72±0.20	31.68	17	63.36±0.30	67.32
9	31.68±0.20	35.64	18	67.32±0.35	71.28
10	35.64±0.25	39.60			


Features:

- 2 ~ 18 circuits available
- Housing material: UL 94V-2 nylon 66
- Terminal material: Tin-plated phosphor bronze
- With or without locking ramp and polarizing tabs
- Feed-Thru and Closed End type
- Wire range: AWG #18 ~ #26 (Flat ribbon wire)

Specification:

- Current rating: 7A AC, DC
- Voltage rating: 250V AC Max.
- Contact resistance: Initial value/10mΩ Max.
After environmental testing/20mΩ Max.
- Insulation resistance: 1000MΩ Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C
(Including temperature rise)

C	Color	Wire size
3	Orange	#18
4	Yellow	#20
2	Red	#22
9	White	#24
6	Blue	#26

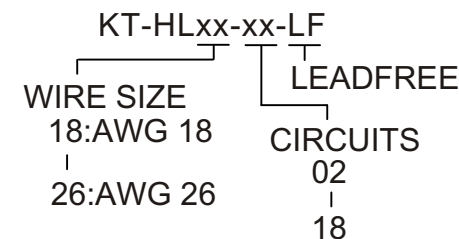

PART NO. KT-HLxx-xx

DWG NO. KT-HLxx-xx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE
.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION: .156"(3.96mm) IDC Connector

AREA	REVISIONS	HK	DATE

煜倫股份有限公司