


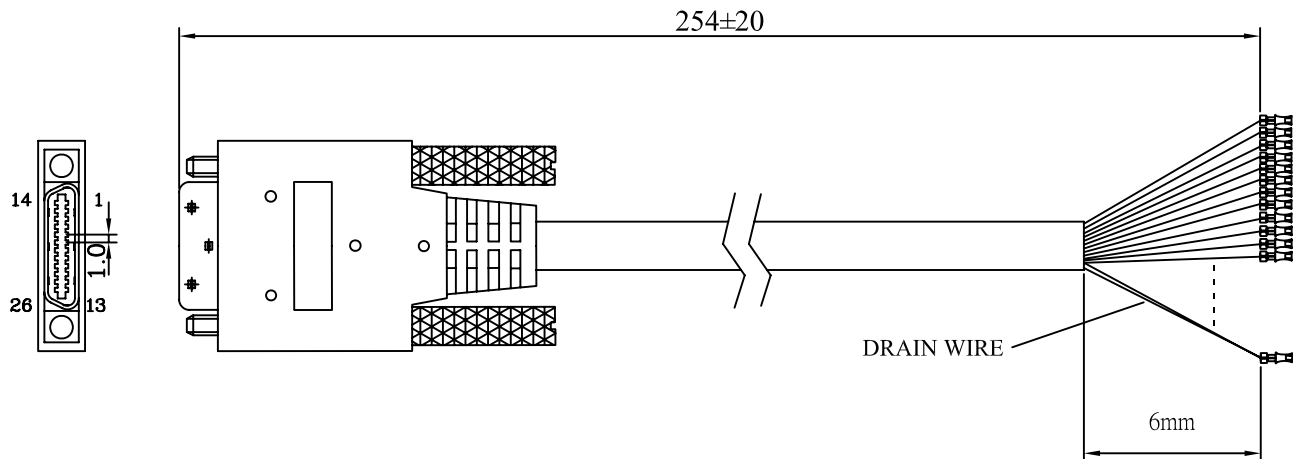

CISMPV-2626-E10N-LF
LEADFREE

RoHS Compliant

	COMPONENTS	DESCRIPTION	Q'TY
1	SFMC26M	CISCO (1.00mm) 26pin male ribbon IDC type Shell: Steel Nickel Plated Insulator: Beige P.B.T Contact: Brass Gold Flash	1
2	Jackscrew	UNC #4-40 Nickel Plated	2
3	Cable	UL2990 28AW*13P+AEB BLACK L:10"	1
4	Hood	P.V.C Molded Color: BLACK Inner Molded With Aluminun Foil Shielded	1
5	TERMINAL	2.0 MPV-T	24

WIRE DIAGRAM

SFMC26P	DB25F
1	<u>YELLOW/BLACK</u> TERMINAL
2	<u>RED/BLACK</u> TERMINAL
3	<u>YELLOW</u> TERMINAL
4	<u>RED/WHITE</u> TERMINAL
5	<u>PINK/BLACK</u> TERMINAL
6	<u>BROWN/WHITE</u> TERMINAL
7	<u>PINK</u> TERMINAL
8	<u>BROWN</u> TERMINAL
9	<u>ORANGE/BLACK</u> TERMINAL
10	<u>PURPLE</u> TERMINAL
11	<u>ORANGE/WHITE</u> TERMINAL
12	<u>LIGHT GREEN</u> TERMINAL
13	<u>ORANGE</u> TERMINAL
14	<u>RED</u> TERMINAL
15	<u>GRAY</u> TERMINAL
16	<u>GRAY/BLACK</u> TERMINAL
17	<u>DRAIN WIRE</u> TERMINAL
18	<u>BLACK</u> TERMINAL
20	<u>WHITE</u> TERMINAL
21	<u>GREEN</u> TERMINAL
22	<u>PURPLE/WHITE</u> TERMINAL
23	<u>GREEN/WHITE</u> TERMINAL
24	<u>BLUE</u> TERMINAL
25	<u>GREEN/BLACK</u> TERMINAL
26	<u>BLUE/WHITE</u> TERMINAL
SHELL	

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. CISMPV-2626-E10N

DWG NO. CISMPV-2626-E10N

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIP TION: CISCO 26P MALE TO MPV-T L:254mm

AREA

REVISIONS

HK

DATE

煜倫股份有限公司