


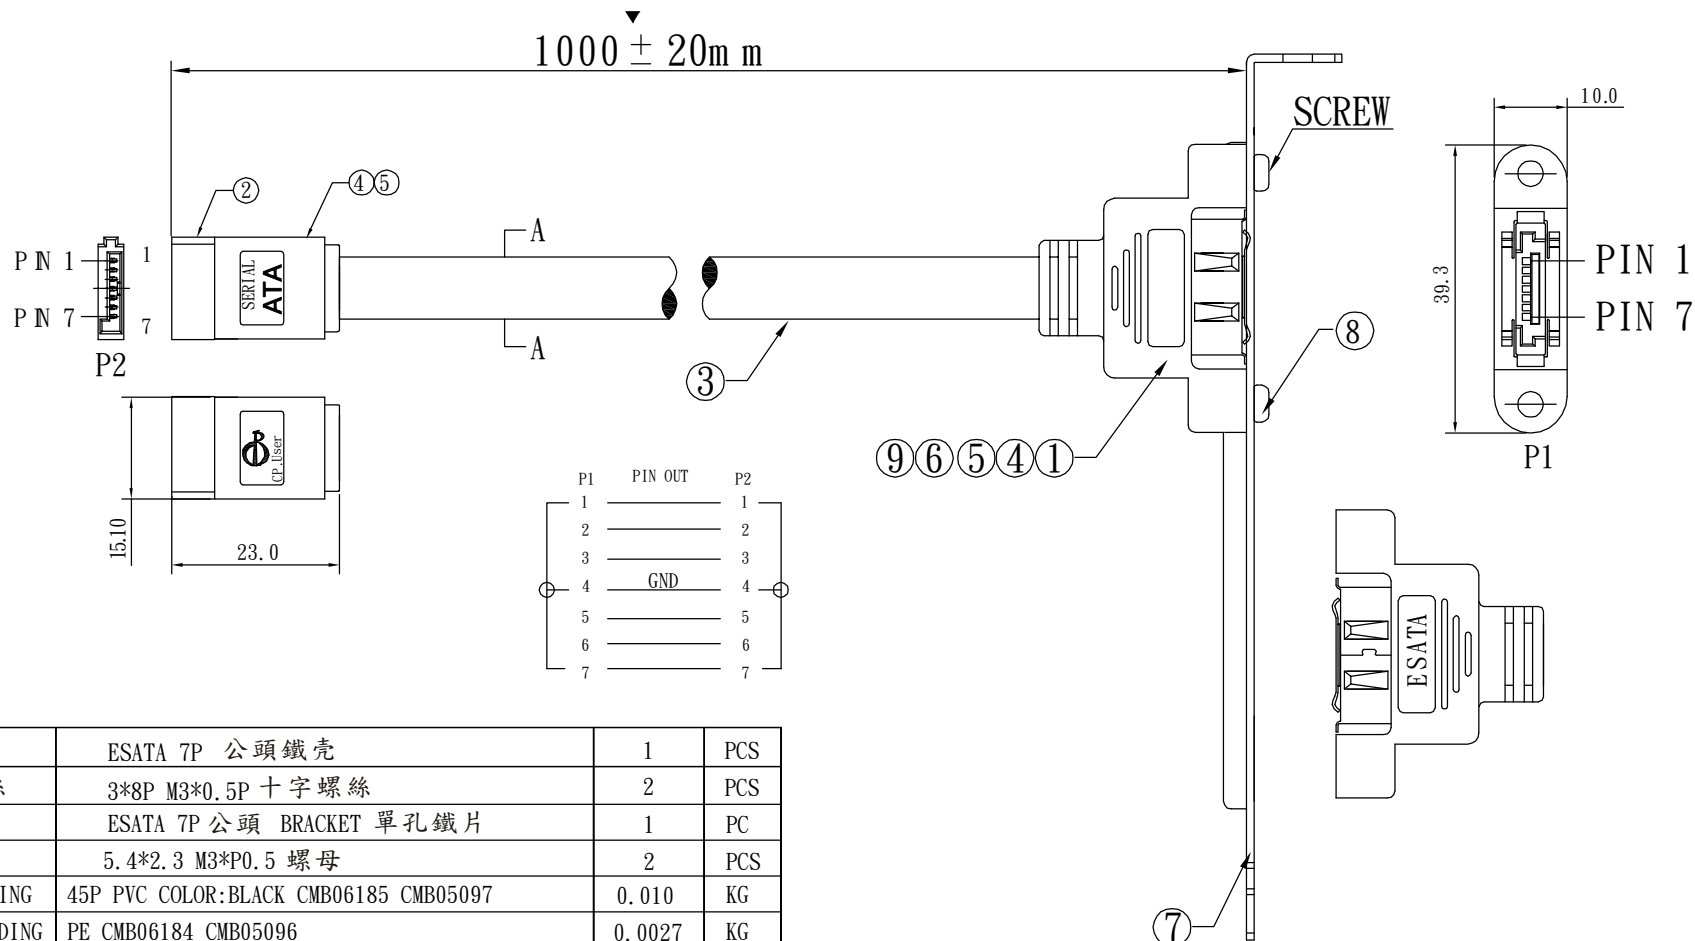

⑨	鐵壳	ESATA 7P 公頭鐵壳	1	PCS
⑧	十字螺絲	3*8P M3*0.5P 十字螺絲	2	PCS
⑦	鐵片	ESATA 7P 公頭 BRACKET 單孔鐵片	1	PC
⑥	螺母	5.4*2.3 M3*P0.5 螺母	2	PCS
⑤	OVER MOLDING	45P PVC COLOR:BLACK CMB06185 CMB05097	0.010	KG
④	INNER MOLDING	PE CMB06184 CMB05096	0.0027	KG
③	SATA CABLE	7C SERIAL ATA 26AWG E119932-T 26AWG(UL16043) RED OD:2.2*7.6+ 0.20mm (UL21149 OR UL2725)	985	mm
②	SATA CONN	S-ATA 7P 7C CONN FEMALE BLACK MOLDING 3U"	1	PCS
①	SATA CONN	ESATA 7P 7C CONN MALE BLACK MOLDING 3U"	1	PCS
NO.	PART NO.	DESCRIPTION	Q' TY	UNIT

ELECTRONIC TEST:

- 1.ALL CABLE 100% TEST,OPEN ,SHORT,MISSWIRE
- 2.CONDUCTANCE RESISTANCE:2 ohm
- 3.INSULATION RESISTANCE:10M ohm AT DC 500V.
- 4.DIMENSIONS MARK"▼"SHOULD BE CHECKED;

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO.ESASA-0707PBMB-E1M

DWG NO. ESASA-0707PBMB-E1M

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

DESCRIP TION:

S-ATA CABLE ASS' Y

AREA

REVISIONS

HK

DATE

煜倫股份有限公司