

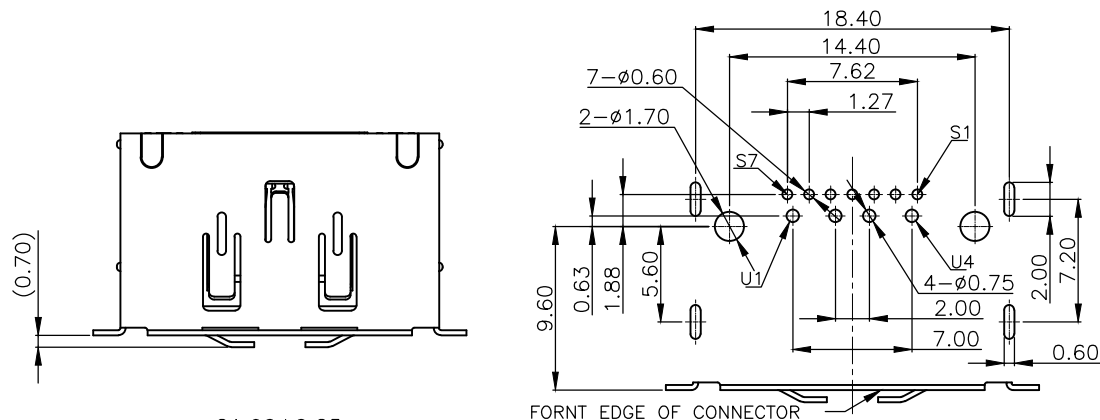
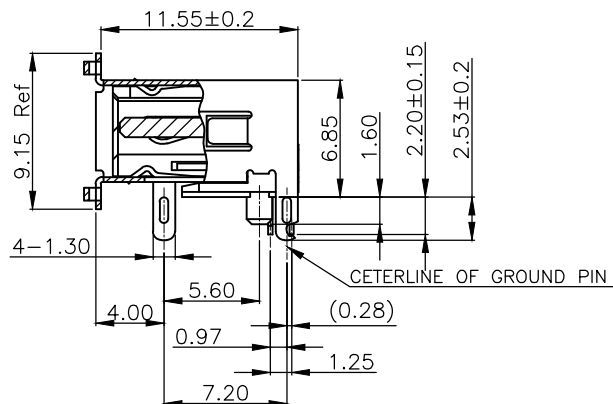


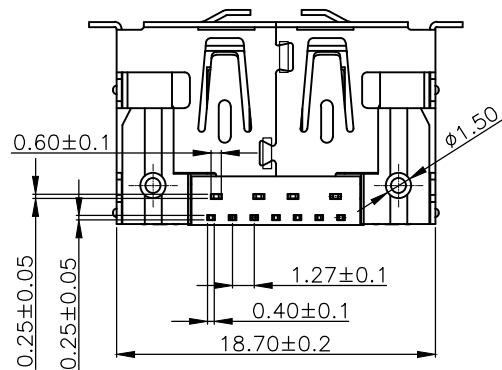

REFERENCE PC BOARD LAYOUT
TOP VIEW (TOL=±0.05)

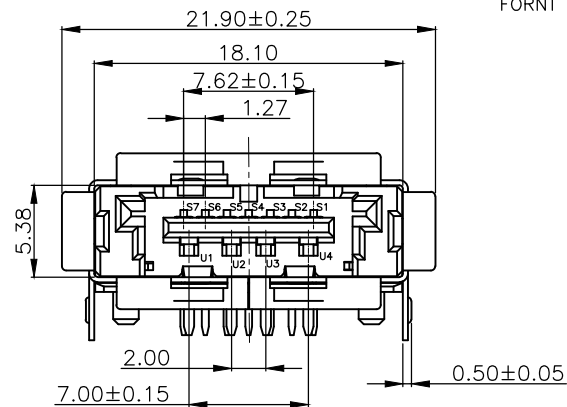

NOTES:

1.MATERIAL:


- 1.1 HOUSING: HIGH TEMPERATURATURE THERAL PLASTIC. COLOR:BLACK
- 1.2 COVER: HIGH TEMPERATURATURE THERAL PLASTIC. COLOR:BLACK
- 1.3 USB CONTACT: COPPER ALLOY.
- 1.4 ESATA CONTACT: COPPER ALLOY.
- 1.5 SHELL :COPPER ALLOY.
- 1.6 LATCH: COPPER ALLOY.

2.FINISH:

- 2.1 CONTACT: (SEE P/N.),50μ" MIN. NICKEL UNDERPLATING OVER ALL.
- 2.2 SHELL:50μ" MIN.NICKEL UNDERPLATING OVER ALL.

PIN DEFINITON

USB		eSATA	
NAME	TYPE	NAME	TYPE
U1	VBUS	S1	GND
U2	D-	S2	A+
U3	D+	S3	A-
U4	GND	S4	GND
		S5	B-
		S6	B+
		S7	GND

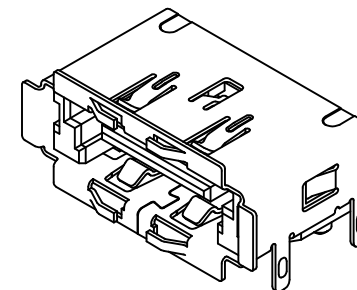

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

0 PLC ± 0.30
1 PLC ± 0.25
2 PLC ± 0.20
3 PLC ± 0.10
ANGULAR: ±5°

照片框

ORDER INFORMATION

ESATAP-PRMMP-074A-LF

SERIES

MALE

POST

METAL FOOT

DIP 90°

LEADFREE

7 PIN TO 4 PIN A TYPE

DESCRIPTION: eSATA+USB Male Frontal DIP TYPE