

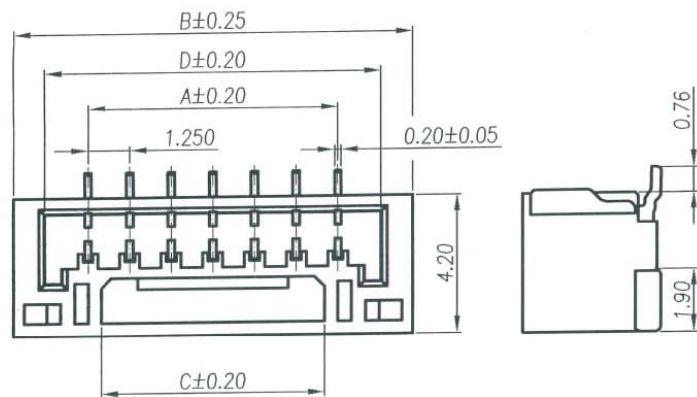
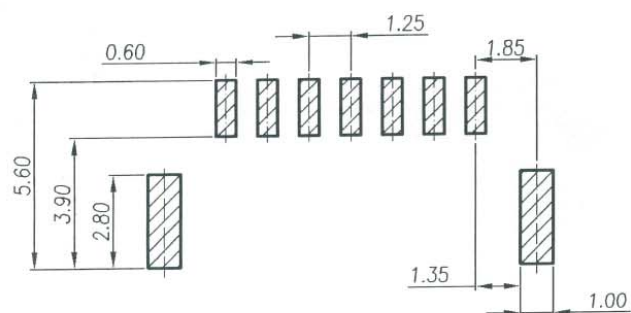



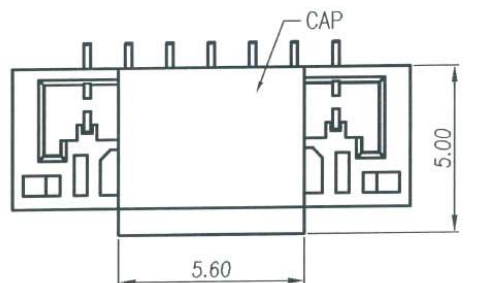


PIN	DIMENSIONS			
	A	B	C	D
02	1.25	5.75	2.20	3.75
03	2.50	7.00	3.30	5.00
04	3.75	8.25	4.55	6.25
05	5.00	9.50	4.55	7.50
06	6.25	10.75	6.55	8.75
07	7.50	12.00	6.55	10.00
08	8.75	13.25	6.55	11.25
09	10.00	14.50	6.55	12.50
10	11.25	15.75	8.55	13.75
11	12.50	17.00	8.55	15.00
12	13.75	18.25	8.55	16.25

Specification
 1.Current Rating:1A AC/DC
 2.Voltage Rating:50V AC/DC
 3.Contact Resistance:30mΩ Max.
 4.Insulation Resistance:100MΩ Min.
 5.Withstand Voltage:AC500V/Minute
 6.Operating Temperature:-25°C~+85°C
 Material:
 1.Housing:Thermoplastic UL94V-0
 2.Contact Pin:Copper Alloy T=0.20mm
 3.Tab:Copper Alloy T=0.20mm
 Finish:
 1.Housing:Natural
 2.Contact Pin:Tin Plated

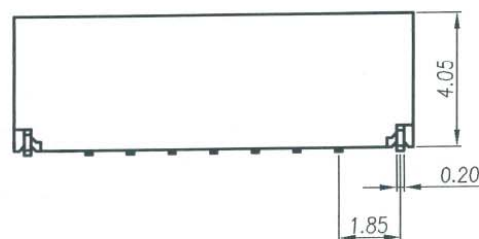

RECOMMENDED P.C.B. LAYOUT

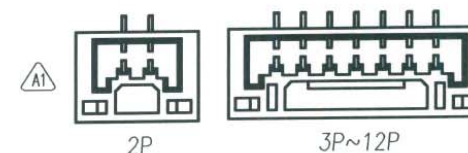

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.08
 ANG ±



PPOJECTION

照片框

ORDER INFORMATION


GH-VBCR-xx-LF
 SERIES REEL CAP BOX 180°SMT
 LEADFREE 02~12 WAY

DESCRIPTION:

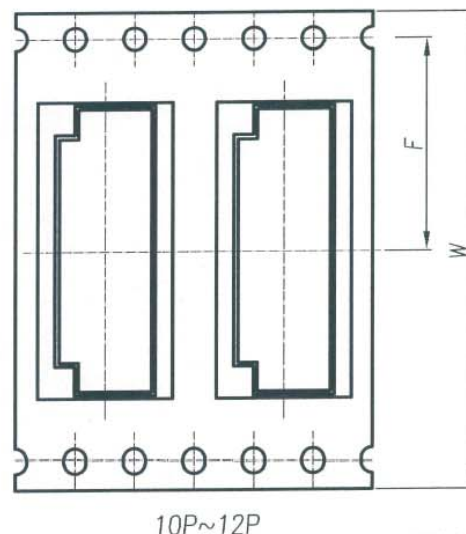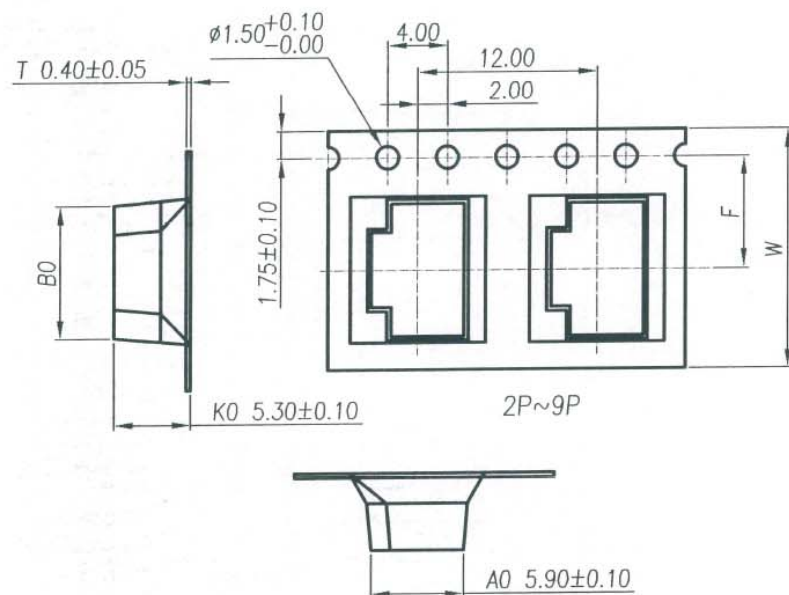


NOTES:

- 1.ALL DIMENSIONS MEET EIA-481-D REQUIREMENTS.
- 2.MATERIAL: WHITE PS
- 3.CARRIER CAMER NOT TO EXCEED 1mm IN 250mm.
- 4.A0 AND B0 MEASURED ON A PLANE 0.3mm ABOVE THE BOTTOM OF THE POCKET.
- 5.K0 MEASURED FROM A PLANE ON THE INSIDE BOTTOM OF THE POCKET TO THE TOP SURFACE OF THE CARRIER.
- 6.Q'ty/Reel:1000PCS. (LENGTH:12.5m) 130 模
- 7.THICKNESS:0.4 ± 0.05 mm.
- 8.REEL:13" 膠盤

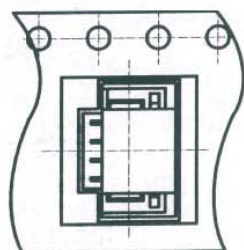


包裝示意圖

CTK.	DIMENSIONS			Q'ty/BOX
	W	F	B0	
2P	16.0	7.500	6.100	19*1000
3P	16.0	7.500	7.350	19*1000
4P	16.0	7.500	8.600	19*1000
5P	24.0	11.500	9.850	14*1000
6P	24.0	11.500	11.100	14*1000
7P	24.0	11.500	12.350	14*1000
8P	24.0	11.500	13.600	14*1000
9P	24.0	11.500	14.850	14*1000
10P	32.0	14.200	16.100	11*1000
12P	32.0	14.200	18.600	11*1000

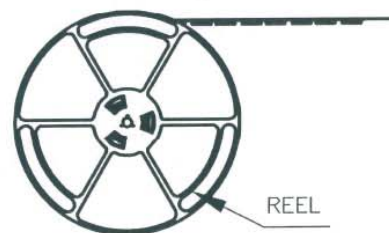

REEL

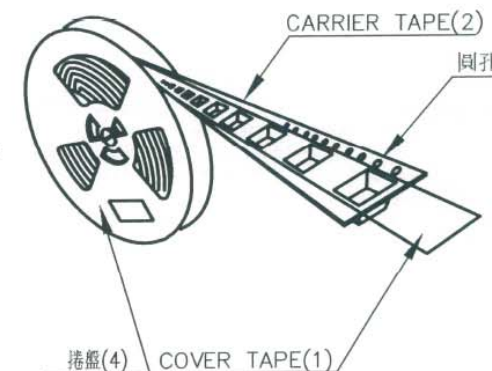

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG $\pm$

PPOJECTION

ORDER INFORMATION

GH-VBCR-xx-LF
SERIES LEADFREE
02~12 WAY
REEL
CAP
BOX
180°SMT

DESCRIPTION: