


HDMIX2-191928-M1M5-LF
LEADFREE

RoHS Compliant

REMARK:
1.HDMI-19P MOLDING NO:DM¹-H731.
2.HDMI-19P AFTER INNER MOLDING WRAPPED COPPER FOIL AND 360° SOLDER CONNECTOR BACK SHELL.

| NO | PART NO | TITLE | DESCRIPTION | Q'TY | UNIT |
|----|----------|-------|--|------|------|
| 12 | NA360030 | TAPE | SINGLE SIDE WITH ADHESIVE TAPE W12*L60mm-RO | 4 | PCS |
| 11 | GC300050 | FOIL | COPPER FOIL W20*L60mm-RO | 2 | PCS |
| 10 | GC300010 | FOIL | COPPER FOIL W5*L30mm-RO | 2 | PCS |
| 9 | JC450060 | TAPE | ACETATE CLOTH TAPE W15*L20mm-RO | 4 | PCS |
| 8 | JA860170 | H.S.T | BLACK HEAT SHRINK TUBE OD:2.0mm-RO L:8mm | 8 | PCS |
| 7 | JA860020 | H.S.T | BLACK HEAT SHRINK TUBE OD:1.5mm-RO L:8mm | 8 | PCS |
| 6 | JA860870 | H.S.T | BLACK HEAT SHRINK TUBE OD:0.8mm-RO L:6mm | 8 | PCS |
| 5 | J1190010 | PE | TRANSPARENT PE-RO | 3 | G |
| 4 | JB513960 | PVC | 45P PVC-RO BLACK(T-000) | 13 | G |
| 3 | GC340060 | TIN | OD:1.0mm-RO | 2.0 | G |
| 2 | 19280010 | CONN. | HDMI-19PSGS4-K-A-RO Solder Type.Shell Nickel Plated. | 2 | PCS |
| 1 | | CABLE | UL20276(1P#28+D+FREE-EDGE-AL)*4C+1P*#28+5C#28-RO+AB BLACK(T-000) | 1 | PC |

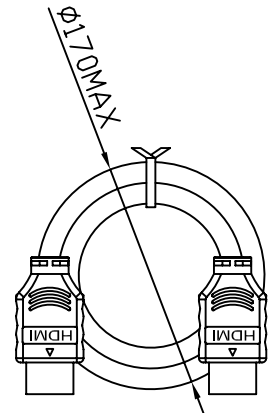

PIN OUT

| P1 | P2 | P1 | P2 |
|----|-------|-------|--------|
| 3 | WHITE | 3 | WHITE |
| 1 | BROWN | 1 | BLUE |
| 2 | DRAIN | 2 | DRAIN |
| 6 | WHITE | 6 | RED |
| 4 | GREEN | 4 | PINK |
| 5 | DRAIN | 5 | GRAY |
| 9 | WHITE | 9 | WHITE |
| 7 | RED | 7 | YELLOW |
| 8 | DRAIN | 8 | ORANGE |
| | | 19 | VIOLET |
| | | SHELL | BRAID |
| | | | SHELL |

MORETHANALL
CONNECTORS
ASSEMBLIES

焯倫股份有限公司

| | | | | | | | |
|-----------------------------|--|---------------|--|------------------------------------|--|---------------------------------------|--|
| PART NO. HDMIX2-191928-M1M5 | | CHECKED BY CY | | TOLERANCES ARE | | DESCRIP TION: HDMI-19M/HDMI-19M CABLE | |
| DWG NO. HDMIX2-191928-M1M5 | | DRAWING BY | | .X ± 0.2 .XX ± .XXX ± AWG | | AREA | |
| FILE NO. | | PROJECTION | | REVISIONS | | HK | |
| UNIT / mm | | SCALE 1:1 | | DATE | | | |