

NOTES:

1.MATERIALS

HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL 94V-0, COLOR BLACK.

TERMINAL: COPPER ALLOY

2.FINISHES

CONTACT AREA: GOLD FINISHED OVER NICKEL

TAIL AREA: TIN FINISHED OVER NICKEL

3.ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING: 0.5A MAX PER CONTACT.


VOLTAGE RATING: 30V DC MAX PER CONTACT.

DIELECTRIC WITHSTANDING VOLTAGE: 300V DC FOR 1 MINUTE.

4.DURABILITY: 250 CYCLES.

5.CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE

2011/65/EU.

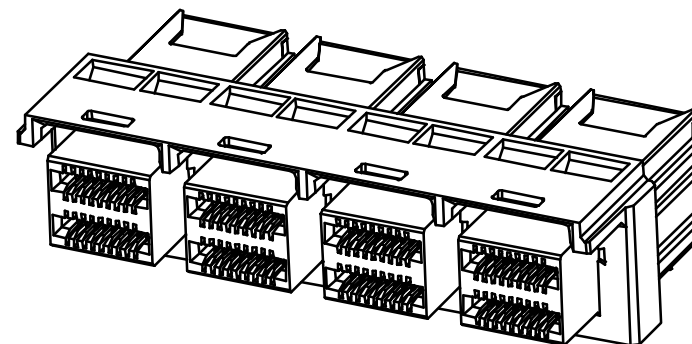

1X4

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.13
.XXX ±
ANG ± 2°

照片框







ORDER INFORMATION

HDSASA4-SQX-36-LF

SERIES

LEADFREE
36 WAY
NON POST
90° PRESS FIT
FEMALE

DESCRIPTION:

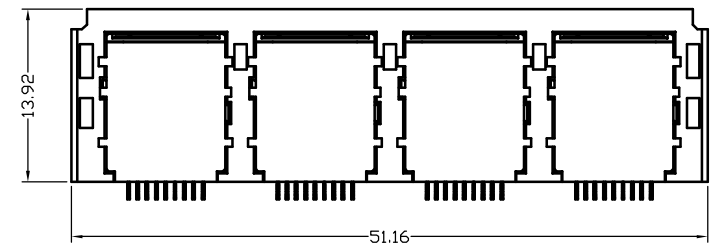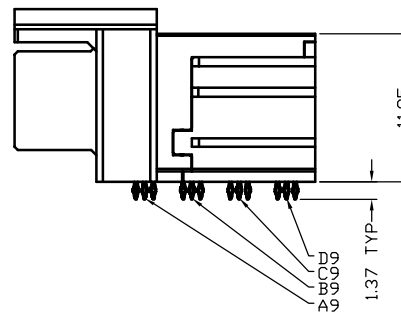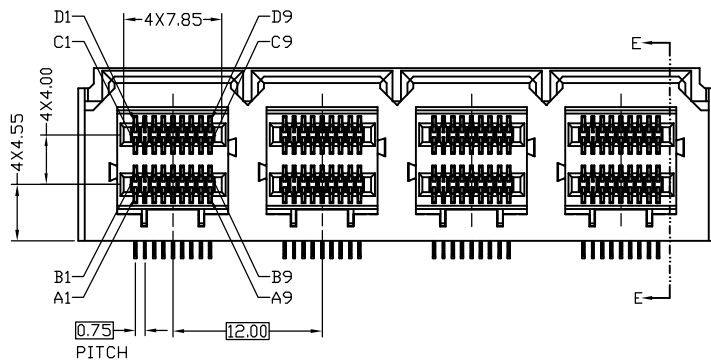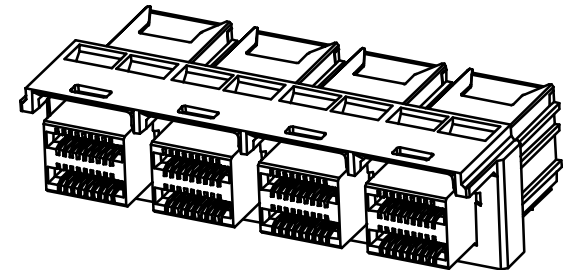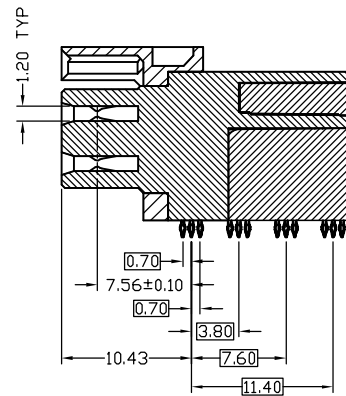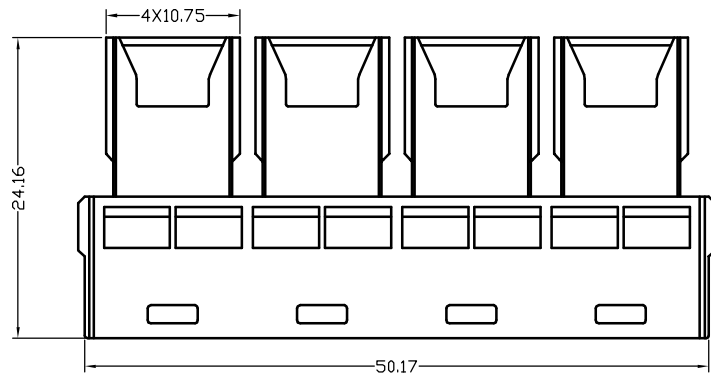

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.13
.XXX ±
ANG ± 2°

PPOJECTION

照片框


ORDER INFORMATION

HDSASA4-SQX-36-LF

SERIES

LEADFREE
36 WAY
NON POST
90° PRESS FIT
FEMALE

DESCRIPTION: MINI SAS HD RECEPTACLE R/A CONN.

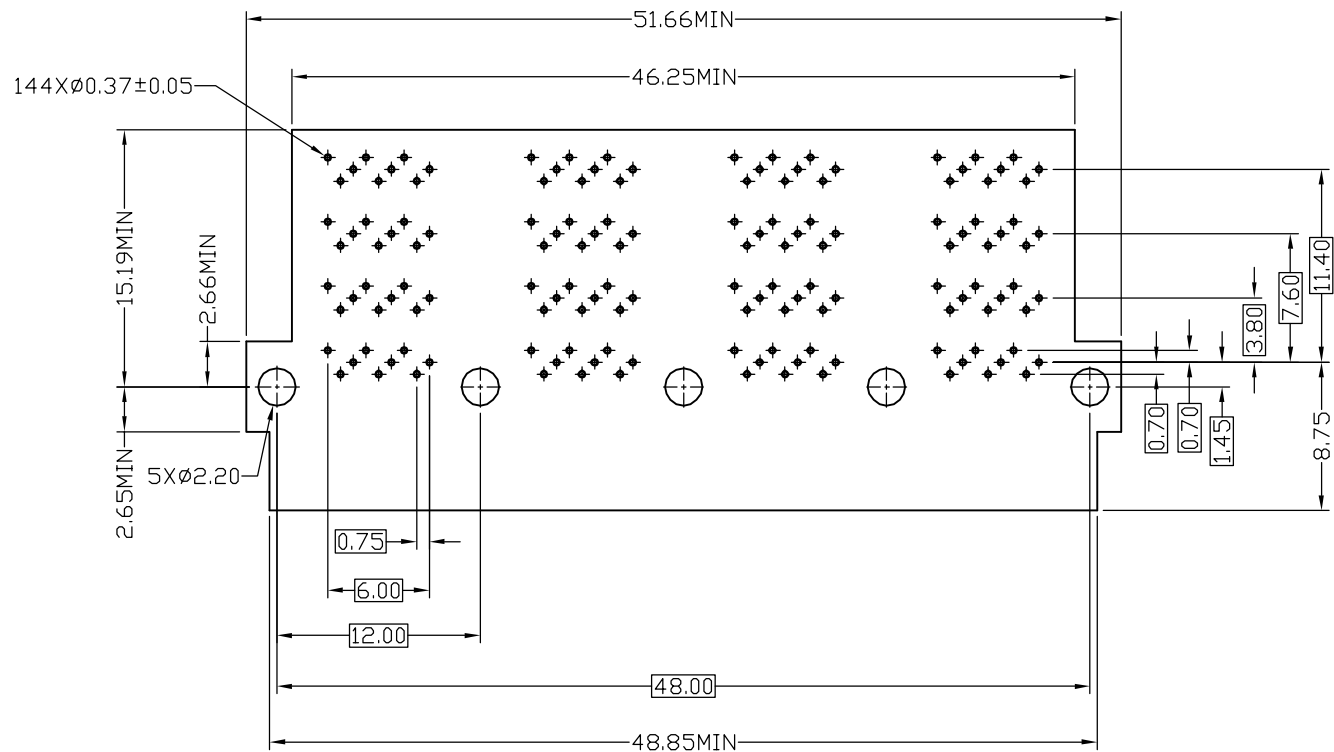

RECOMMENDED PCB LAYOUT(1X4)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X ± 0.25
.XX ± 0.13
.XXX $\pm$
ANG $\pm 2^\circ$

PPOJECTION

照片框

ORDER INFORMATION

HDSASA4-SQX-36-LF


SERIES

LEADFREE
36 WAY
NON POST
90° PRESS FIT
FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: MINI SAS HD RECEPTACLE R/A CONN.

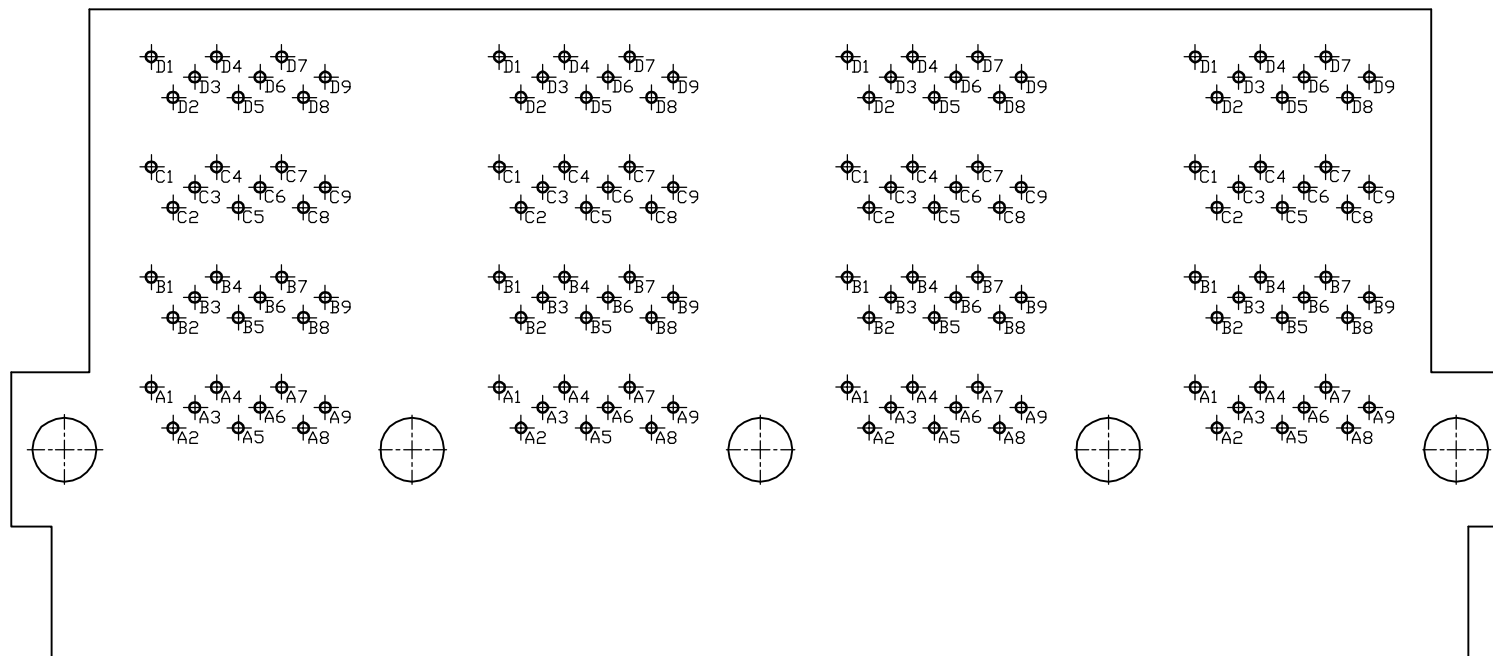

FOOTPRINT CIRCUIT IDENTIFICATION<1X4>

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.13

DATE

.XXX ±

ANG ± 2°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

HDSASA4-SQX-36-LF

SERIES

LEADFREE
36 WAY
NON POST
90° PRESS FIT
FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: MINI SAS HD RECEPTACLE R/A CONN.