

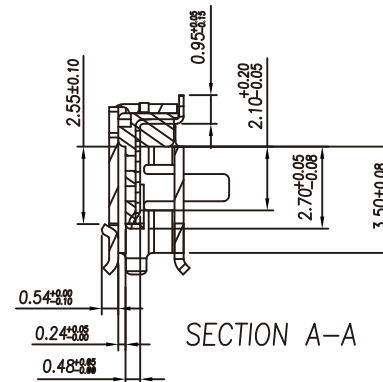
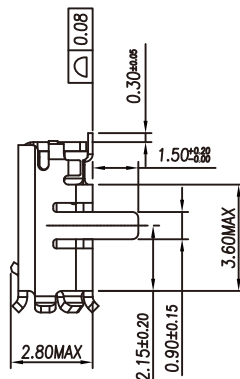
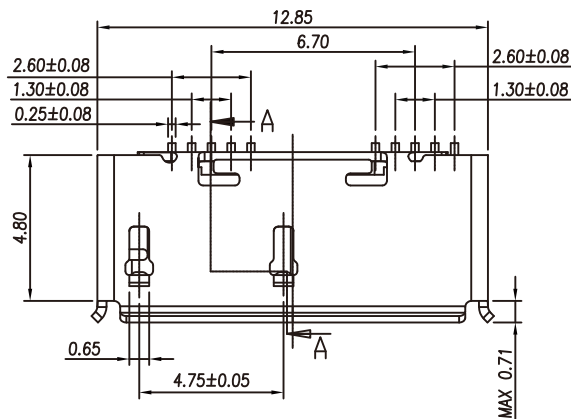


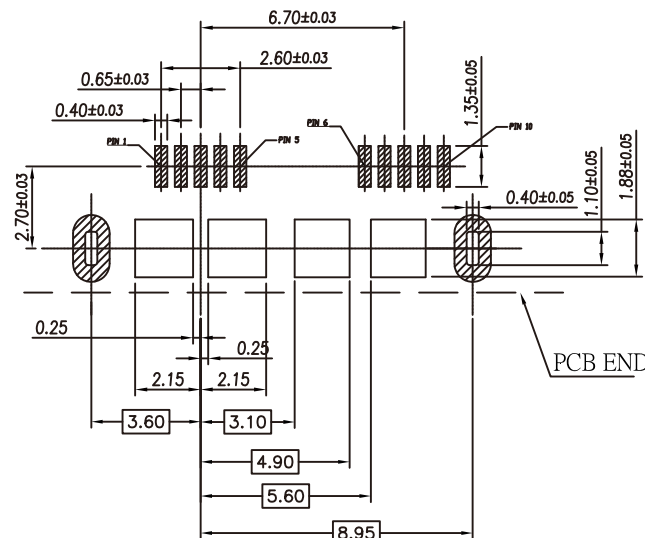

PIN NUMBER	SIGNAL NAME
PIN 1	VBUS
PIN 2	D+
PIN 3	D-
PIN 4	ID
PIN 5	GND
PIN 6	MicB_SSTX-
PIN 7	MicB_SSTX+
PIN 8	GND_DRAIN
PIN 9	MicB_SSRX-
PIN 10	MicB_SSRX+
SHELL	Shield

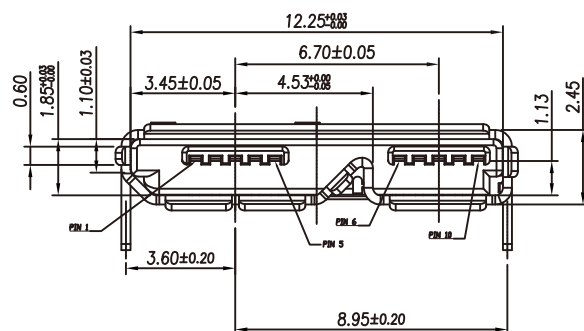

NOTE:

- MATERIAL :
 - HOUSING : LCP UL94V-0 ; COLOR : BLACK
 - CONTACT : PHOSPHOR BRONZE C5191-H T=0.15mm
 - SHELL : STAINLESS STEEL SUS-304 T=0.30mm
- FINISH :
 - CONTACT :
 - CONTACT AREA : 15 MICRO INCHES MIN. GOLD PLATED
 - SOLDER AREA : TIN
 - UNDER PLATE : NICKEL
 - SHELL : NICKEL PLATED OVER ALL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

照片框

ORDER INFORMATION

MISB-SWM15-10B-LF

SERIES 10 PIN B TYPE
1.5mm
METAL FOOT
90°SMT
FEMALE

DESCRIPTION: Micro USB3.0 B TYPE (F) 板SMT(鍍DIP) (黑色/金15u")