
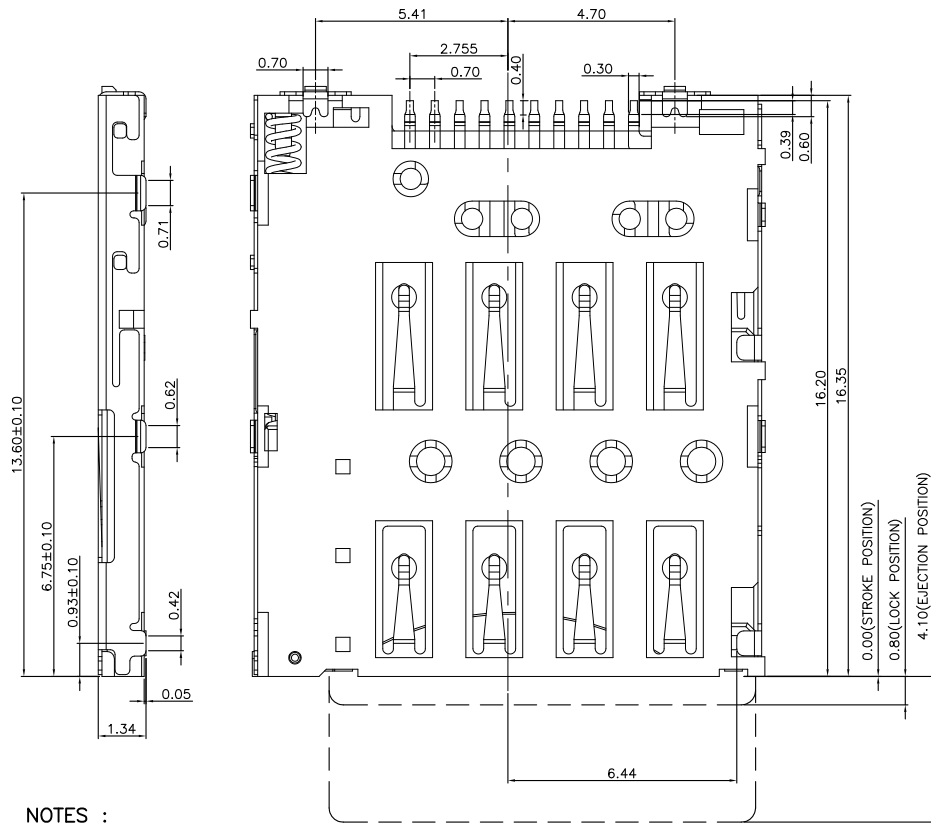


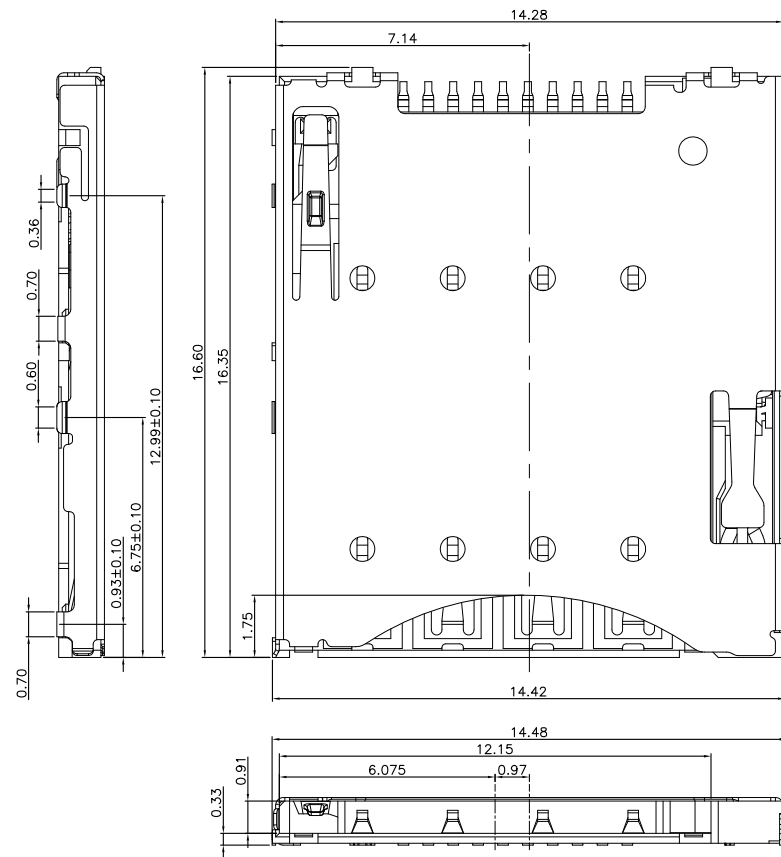

NOTES :

1. MATERIAL :

- 1.1 HOUSING/SLIDER:LCP UL94 V-0, BLACK COLOR.
- 1.2 SHELL: SUS304-H T=0.10mm
- 1.3 CONTACT: C5210-EH T=0.12mm

2. FINISH :

- 2.1 CONTACT: Au 1-3u" ON CONTACT AREA,
Au 1u"MIN ON SOLDER TAIL AREA.
- 2.2 SHELL: 50u" MIN NICKEL PLATING OVERALL.
Au 1u"MIN ON SOLDER TAIL AREA.

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XXX ±

DATE

ANG ±

SIZE A4

PPOJECTION

ORDER INFORMATION

MISCP-W13EA-08-LF

SERIES

LEADFREE


08 WAY

SWITCH CLOSED

EAR WIDTH 13.6mm


90°SMT

DESCRIPTION: Micro SIM Push H1.34

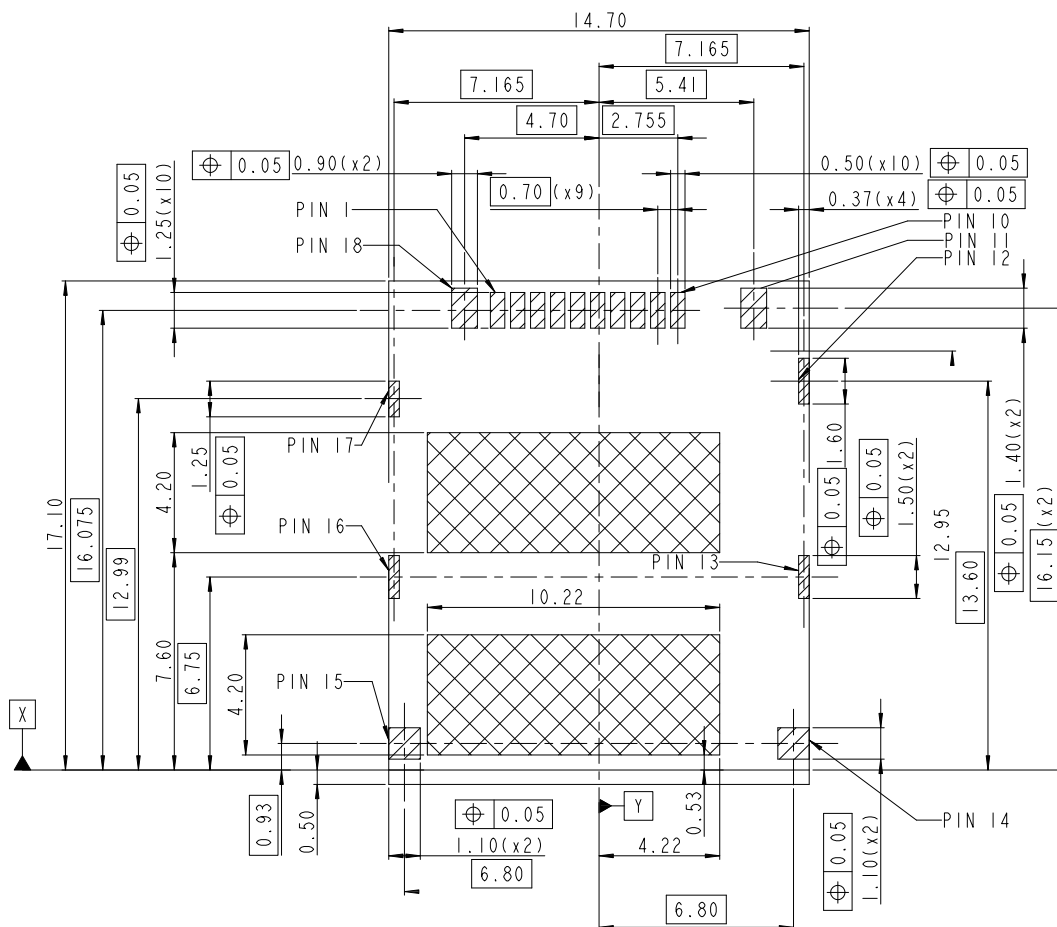

: LAND AREA
 : NO PARTS AREA
 : NO PATTERN AREA

REMCOMMENDED PCB LAYOUT
 TOLERANCE:±0.05mm

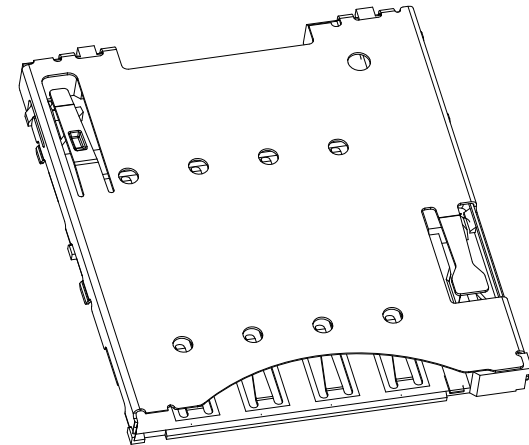

PIN NUMBER	PIN ASSIGN	FUNCTION
1	CD	SIM CARD DETECT
2	C8	RESERVE
3	C4	RESERVE
4	C7	I/O
5	C3	CLK
6	C6	Vpp
7	C2	RST
8	C5	GND
9	C1	Vcc
10	N/A	RESERVE
11	GND	GND
12	GND	GND
13	GND	GND
14	GND	GND
15	GND	GND
16	GND	GND
17	GND	GND
18	GND	GND

CARD DETECT SWITCH	
CARD UNINSERTION	CLOSE
CARD HALF INSERTION	CLOSE
CARD INSERTION	OPEN
N/O	CLOSE OPEN
	PIN 1 PIN 1 PIN 1

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ± 0.50

.X, ± 0.30

.XX, ± 0.20

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MISCP-W13EA-08-LF

SERIES

LEADFREE

08 WAY

SWITCH CLOSED

EAR WIDTH 13.6mm

90°SMT

DESCRIPTION: Micro SIM Push H1.34