
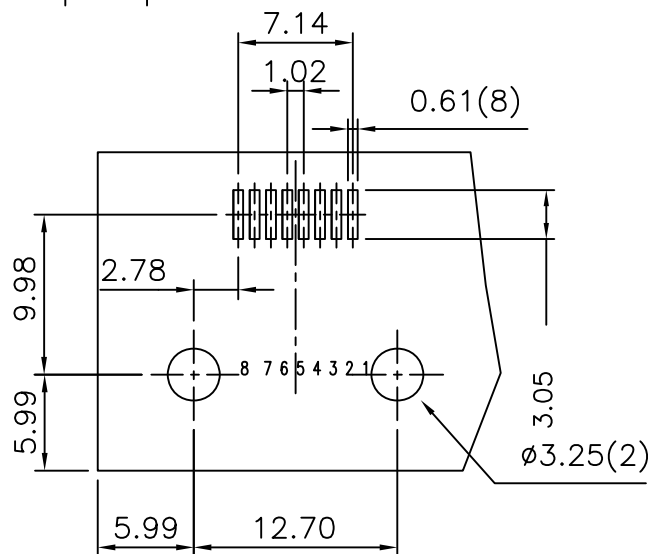
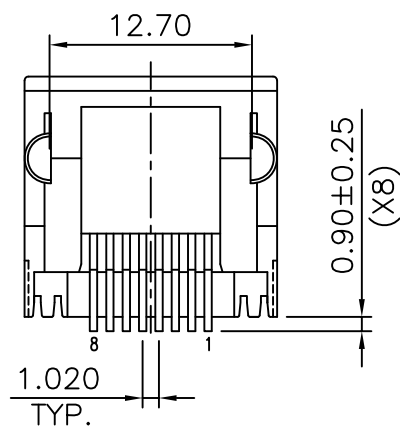
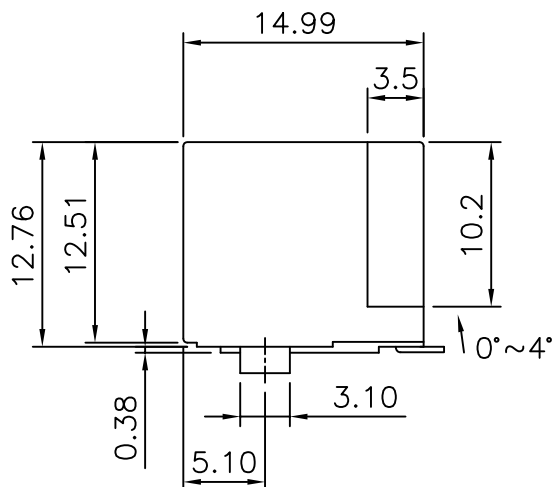


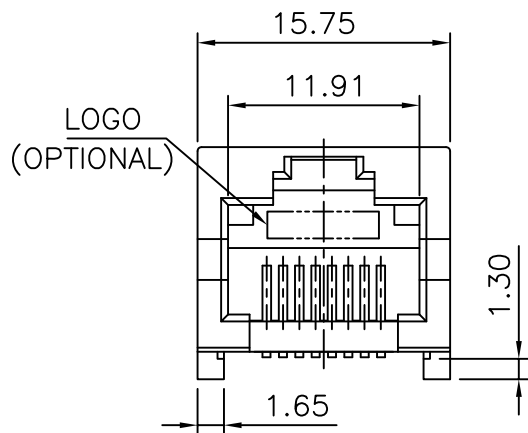

MATERIAL:

- HOUSING—DSM STANYL TE250F6 (NYLON—46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V—0
- CONTACTS—0.35mm THICK PHOS—BRONZE PLATED
WITH HARD GOLD AND TIN/LEAD IN
SOLDER AREA.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

PCB LAYOUT

Ref.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MJW12U-KX06PR-0808-LF

SERIES

REEL

POST

8P8C



LEADFREE

BLACK

06u" GOLD

NON EAR

DESCRIPTION: MODULAR JACK, RJ45, WITHOUT LED'S SMT TYPE, SIDE ENTRY

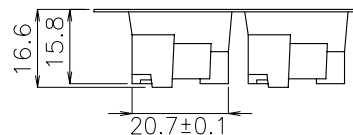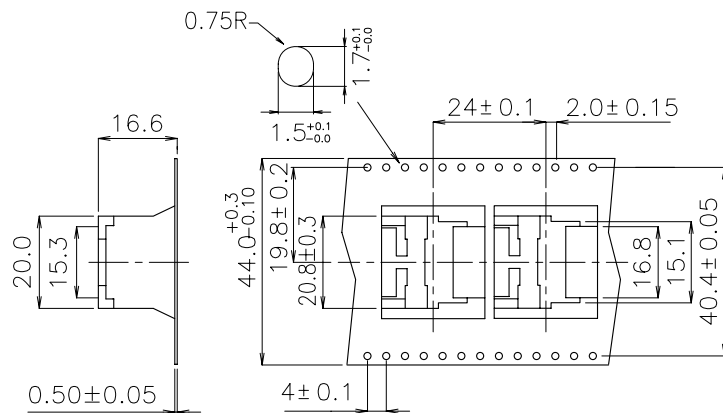


COVER TAPE
料號 361-033

CARRIER
料號 361-083


MATERIALS:

- REEL-2mm THICK PLASTIC WHEEL.
- CARRIER-PS (0.50mm THICK TAPE).
- COVER TAPE -PE (0.045~0.12mm THICK TAPE).

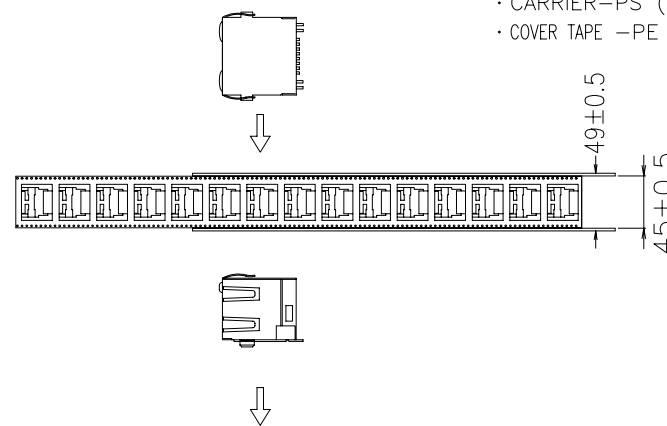

REEL

料號 361-092

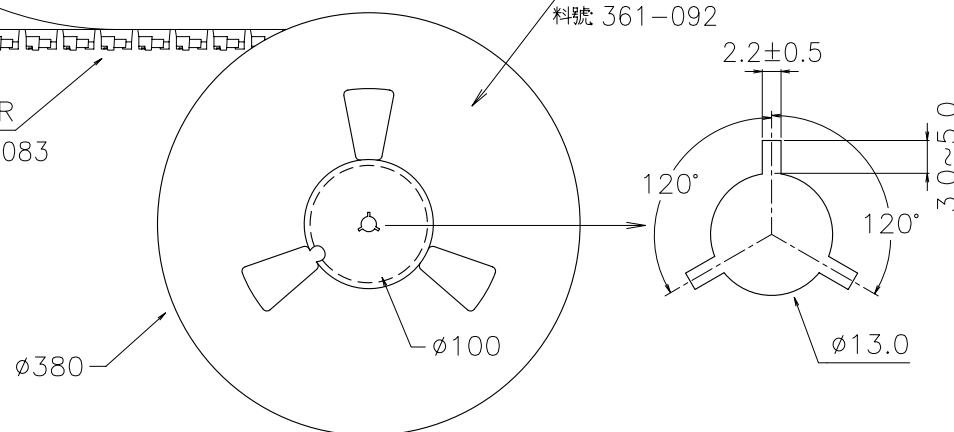

外箱料號 361-090(X1) NO MARK

支撐架料號 361-058(X4)

軸外保護帶料號 361-319

NOTES:

- THE DIRECTION OF JACKS PUT INTO CARRIER.
- 10 EMPTY CAVITIES FOR BOTH OF TOP AND BOTTOM OF THE CARRIER.
- 200 PCS PRODUCTS BE PACKAGED ONE REEL.
- CARTON SIZE: 395(L)X390(W)X315(H)
6 REEL/CARTON
TOTAL: 1200 PCS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MJW12U-KX06PR-0808-LF

SERIES

REEL

POST

8P8C

06u" GOLD

NON EAR

LEADFREE

BLACK

DESCRIPTION: TAPE & REEL PACKAGING SPEC.