


Recommended P.C.B Layout

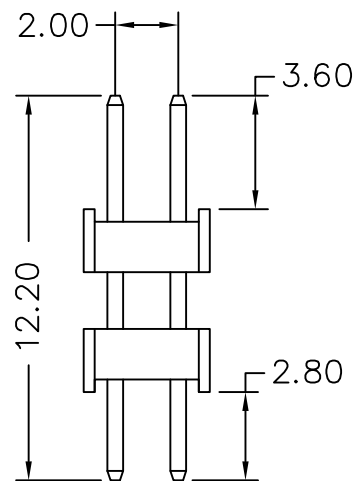

MATERIAL

Contact Pin : Brass
 Insulator : PBT UL94-V0

SPECIFICATION

Current Rate : 1 AMP
 Insulation Resistance : 5000mΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Dielectric Voltage : AC 500V for one minute
 Operation Temperature : -25°C to +85°C

POLES	DIM E	POLES	DIM E
		23	44.00
2	2.00	24	46.00
3	4.00	25	48.00
4	6.00	26	50.00
5	8.00	27	52.00
6	10.00	28	54.00
7	12.00	29	56.00
8	14.00	30	58.00
9	16.00	31	60.00
10	18.00	32	62.00
11	20.00	33	64.00
12	22.00	34	66.00
13	24.00	35	68.00
14	26.00	36	70.00
15	28.00	37	72.00
16	30.00	38	74.00
17	32.00	39	76.00
18	34.00	40	78.00
19	36.00	41	80.00
20	38.00	42	82.00
21	40.00	43	84.00
22	42.00	44	86.00

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY


CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

X. ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ± 3°



ORDER INFORMATION

MSB-D1223628-2Xxx-LF
 SERIES | LEADFREE
 2X02:04 WAY
 2X44:88 WAY
 DIP 2.8mm
 DIP 3.6mm
 LONG 12.20mm
 DIP 180°

DESCRIPTION: PIN HEADER 2.00*2.00mm STRAIGHT TYPE, DUAL ROWS DUAL INSULATORS