

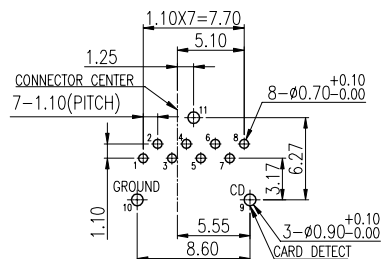
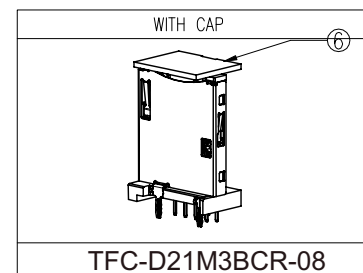
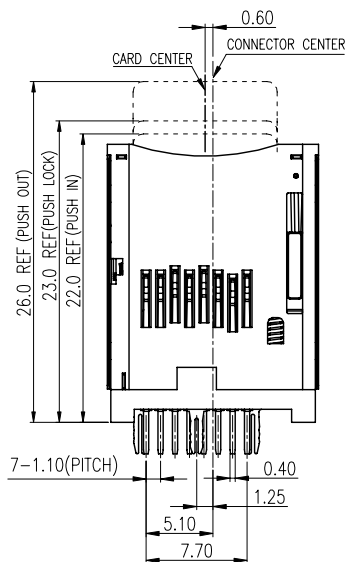
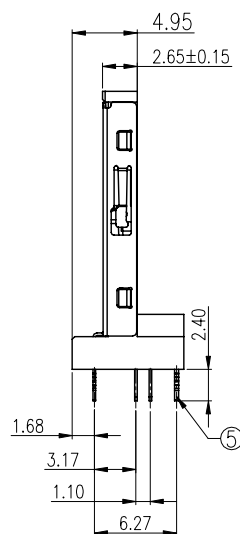


PIN#	DESCRIPTION
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1
9	CD
10	GND
11	/

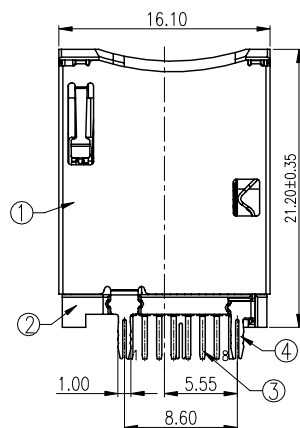

RECOMMENDED PCB LAYOUT
TOLERANCE=±0.05



6	CAP	1	LCP	UL94V-0, BLACK
5	BOARD LOCK	1	BRASS T=0.30mm	80u" TIN PLATING ON SOLDER TAIL AREA, UNDER PLATING 30u" NICKEL ALL OVER
4	CD PIN	1	PHOSPHOR BRONZE T=0.20mm	GOLD FLASH PLATED ON CONTACT AREA; 80u" TIN PLATING ON SOLDER TAIL AREA; UNDER PLATING 30u" NICKEL ALL OVER
3	CONTACT	8	PHOSPHOR BRONZE T=0.20mm	GOLD PLATED ON CONTACT AREA; 80u" TIN PLATING ON SOLDER TAIL AREA; UNDER PLATING 30u" NICKEL ALL OVER
2	HOUSING	1	LCP	UL94V-0, BLACK
1	SHELL	1	SUS T=0.20mm	30u" NICKEL PLATED
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.38

.XX ± 0.25

.XXX ± 0.15

ANG ±

PPOJECTION


照片框

ORDER INFORMATION



TFC-D21M3BCR-08-LF

SERIES
DIP 180°
HIGH 21.2mm
REEL
CAP
B TYPE
METAL FOOT X 3
LEADFREE
08 WAY

DESCRIPTION: MICRO SD CARD VERTICAL WITH PUSH DIP TYPE

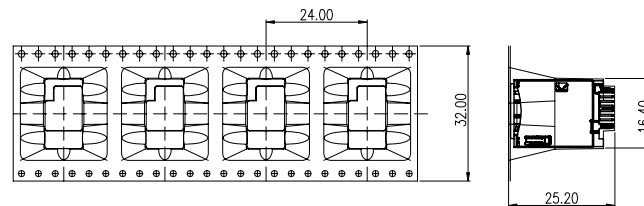

包裝150pcs, 前後各空7格

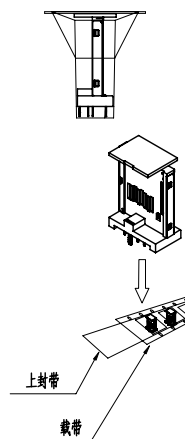

1 PCS PE BAG

CARDBOARD


CARDBOARD

10PCS REEL

1 BAG DESICCANT

1 PCS CARTON: 400*400*400mm

NOTES:
1: 150 PCS/REEL
2: 1500 PCS/CARTON

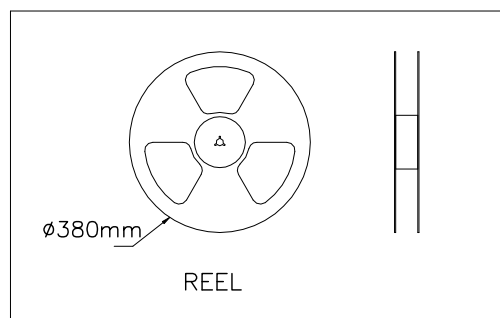

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.38

UNIT / mm

SCALE 1 : 1

.XX ± 0.25

DATE

.XXX ± 0.15

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

TFC-D21M3BCR-08-LF
SERIES T LEADFREE
DIP 180° REEL 08 WAY
HIGH 21.2mm CAP B TYPE
METAL FOOT X 3

DESCRIPTION: MICRO SD CARD VERTICAL WITH PUSH DIP TYPE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com